


TEMPSTAR®

Heating and Cooling Products

NAC018*WA, NAC024*WA, NAC036*WA, NAC048AWA

**EBW FAN COIL MATCH
50HZ EXPANDED PERFORMANCE DATA**

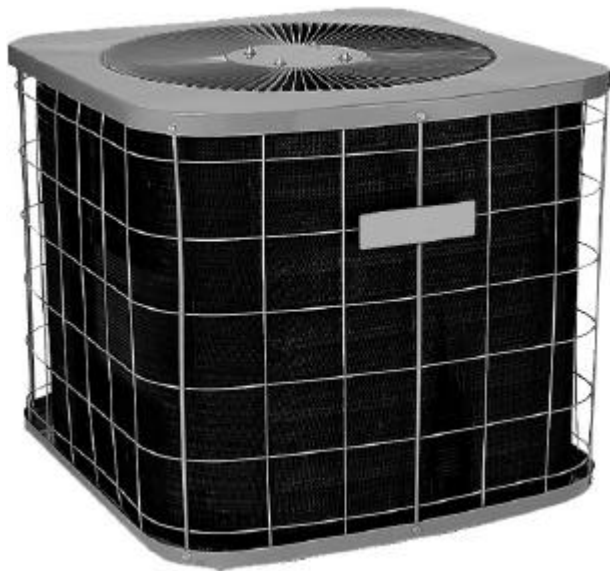

EBW

NAC018*W/EBW1800A

NET COOLING CAPACITY

Expanded Performance Data - COOLING CAPACITY

IDB	airflow CFM	F/C	CMH	Ambient Air Temperature Deg F/C Dry Bulb																											
				65				75				85				95				105				115				125			
				18	18	18	18	24	24	24	24	29	29	29	29	35	35	35	35	41	41	41	41	46	46	46	46	51	51	51	51
Entering Indoor Air Temperature WB Deg																															
		Deg F	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
		Deg C	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	
70 21	770 1309	MBh	18.0	18.6	20.4	-	17.6	18.2	19.9	-	17.1	17.8	19.5	-	16.7	17.3	19.0	-	15.9	16.5	18.0	-	14.7	15.3	16.7	-	12.7	13.1	14.4	-	
		kW Capacity	5.3	5.5	6.0	-	5.1	5.3	5.8	-	5.0	5.2	5.7	-	4.9	5.1	5.6	-	4.7	4.8	5.3	-	4.3	4.5	4.9	-	3.7	3.8	4.2	-	
		S/T	0.78	0.65	0.45	-	0.80	0.67	0.47	-	0.82	0.69	0.48	-	0.85	0.71	0.49	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	
		kW Input	1.59	1.62	1.67	-	1.71	1.75	1.81	-	1.83	1.87	1.93	-	1.92	1.97	2.03	-	2.01	2.05	2.12	-	2.08	2.13	2.20	-	2.25	2.30	2.38	-	
75 24	770 1309	MBh	18.3	18.8	20.4	21.9	17.9	18.4	19.9	21.4	17.4	18.0	19.4	20.9	17.0	17.5	19.0	20.3	16.2	16.6	18.0	19.3	15.0	15.4	16.7	17.9	12.9	13.3	14.4	15.4	
		kW Capacity	5.4	5.5	6.0	6.4	5.2	5.4	5.8	6.3	5.1	5.3	5.7	6.1	5.0	5.1	5.6	6.0	4.7	4.9	5.3	5.7	4.4	4.5	4.9	5.2	3.8	3.9	4.2	4.5	
		S/T	0.88	0.79	0.60	0.38	0.91	0.82	0.62	0.40	0.94	0.84	0.63	0.41	0.97	0.87	0.65	0.42	1.00	0.90	0.68	0.44	1.00	0.91	0.69	0.44	1.00	1.00	0.72	0.47	
		kW Input	1.60	1.64	1.69	1.75	1.73	1.77	1.83	1.89	1.84	1.88	1.95	2.01	1.94	1.98	2.05	2.12	2.03	2.07	2.14	2.22	2.10	2.15	2.22	2.30	2.27	2.32	2.40	2.48	
80 27	770 1309	MBh	18.6	19.0	20.3	21.7	18.2	18.6	19.8	21.2	17.7	18.1	19.4	20.7	17.3	17.7	18.9	20.2	16.4	16.8	18.0	19.2	15.2	15.6	16.6	17.8	13.1	13.4	14.3	15.3	
		kW Capacity	5.5	5.6	6.0	6.4	5.3	5.4	5.8	6.2	5.2	5.3	5.7	6.1	5.1	5.2	5.5	5.9	4.8	4.9	5.3	5.6	4.5	4.6	4.9	5.2	3.8	3.9	4.2	4.5	
		S/T	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.57	1.00	0.96	0.78	0.59	1.00	1.00	0.81	0.61	1.00	1.00	0.84	0.63	1.00	1.00	0.85	0.63	1.00	1.00	0.88	0.66	
		kW Input	1.61	1.65	1.70	1.76	1.74	1.78	1.84	1.90	1.86	1.90	1.96	2.03	1.96	2.00	2.07	2.14	2.04	2.09	2.16	2.24	2.12	2.17	2.24	2.32	2.29	2.34	2.42	2.51	
85 29	770 1309	MBh	18.9	19.3	20.2	21.6	18.5	18.9	19.7	21.1	18.1	18.4	19.3	20.6	17.6	18.0	18.8	20.1	16.7	17.1	17.9	19.1	15.5	15.8	16.5	17.7	13.3	13.6	14.2	15.2	
		kW Capacity	5.6	5.7	5.9	6.3	5.4	5.5	5.8	6.2	5.3	5.4	5.6	6.0	5.2	5.3	5.5	5.9	4.9	5.0	5.2	5.6	4.5	4.6	4.9	5.2	3.9	4.0	4.2	4.5	
		S/T	1.00	0.98	0.88	0.72	1.00	1.00	0.92	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.79	1.00	1.00	1.00	0.82	1.00	1.00	1.00	0.82	1.00	1.00	1.00	0.85	
		kW Input	1.63	1.66	1.72	1.77	1.76	1.80	1.86	1.92	1.87	1.91	1.98	2.05	1.97	2.02	2.09	2.16	2.06	2.11	2.18	2.26	2.13	2.18	2.26	2.34	2.31	2.36	2.44	2.53	

NAC018*W/EBW1800A

NET COOLING CAPACITY

Expanded Performance Data - COOLING CAPACITY

IDB	airflow CFM	F/C		Ambient Air Temperature Deg F/C Dry Bulb																											
				65 18				75 24				85 29				95 35				105 41				115 46				125 51			
				Entering Indoor Air Temperature WB Deg																											
	Deg F	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
	Deg C	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22		
70 21	678 1153	MBh	17.4	18.0	19.8	-	17.0	17.6	19.3	-	16.6	17.2	18.9	-	16.2	16.8	18.4	-	15.4	15.9	17.5	-	14.3	14.8	16.2	-	12.3	12.7	13.9	-	
		kW Capacity	5.1	5.3	5.8	-	5.0	5.2	5.7	-	4.9	5.0	5.5	-	4.7	4.9	5.4	-	4.5	4.7	5.1	-	4.2	4.3	4.7	-	3.6	3.7	4.1	-	
		S/T	0.71	0.59	0.41	-	0.73	0.61	0.43	-	0.75	0.63	0.44	-	0.78	0.65	0.45	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	
	kW Input	1.58	1.61	1.67	-	1.71	1.75	1.80	-	1.82	1.86	1.93	-	1.92	1.97	2.03	-	2.01	2.05	2.12	-	2.08	2.13	2.20	-	2.25	2.30	2.38	-		
75 24	678 1153	MBh	17.7	18.2	19.7	21.2	17.3	17.8	19.3	20.7	16.9	17.4	18.8	20.2	16.5	17.0	18.4	19.7	15.6	16.1	17.4	18.7	14.5	14.9	16.2	17.3	12.5	12.8	13.9	14.9	
		kW Capacity	5.2	5.3	5.8	6.2	5.1	5.2	5.6	6.1	4.9	5.1	5.5	5.9	4.8	5.0	5.4	5.8	4.6	4.7	5.1	5.5	4.2	4.4	4.7	5.1	3.7	3.8	4.1	4.4	
		S/T	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.60	0.38	0.92	0.82	0.62	0.40	0.93	0.83	0.63	0.40	1.00	1.00	0.66	0.43	
	kW Input	1.59	1.63	1.68	1.74	1.72	1.76	1.82	1.88	1.84	1.88	1.94	2.01	1.94	1.98	2.05	2.12	2.02	2.07	2.14	2.22	2.10	2.15	2.22	2.30	2.27	2.32	2.40	2.49		
80 27	678 1153	MBh	18.0	18.4	19.7	21.0	17.6	18.0	19.2	20.5	17.2	17.6	18.8	20.1	16.8	17.1	18.3	19.6	15.9	16.3	17.4	18.6	14.8	15.1	16.1	17.2	12.7	13.0	13.9	14.8	
		kW Capacity	5.3	5.4	5.8	6.2	5.2	5.3	5.6	6.0	5.0	5.1	5.5	5.9	4.9	5.0	5.4	5.7	4.7	4.8	5.1	5.4	4.3	4.4	4.7	5.0	3.7	3.8	4.1	4.3	
		S/T	0.88	0.83	0.67	0.50	0.92	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.57	1.00	0.95	0.77	0.58	1.00	1.00	0.80	0.61	
	kW Input	1.61	1.64	1.70	1.75	1.74	1.78	1.84	1.90	1.85	1.90	1.96	2.03	1.96	2.00	2.07	2.14	2.04	2.09	2.16	2.24	2.12	2.17	2.24	2.32	2.29	2.34	2.42	2.51		
85 29	678 1153	MBh	18.3	18.7	19.6	20.9	17.9	18.3	19.1	20.4	17.5	17.8	18.7	19.9	17.1	17.4	18.2	19.4	16.2	16.5	17.3	18.5	15.0	15.3	16.0	17.1	12.9	13.2	13.8	14.7	
		kW Capacity	5.4	5.5	5.7	6.1	5.2	5.4	5.6	6.0	5.1	5.2	5.5	5.8	5.0	5.1	5.3	5.7	4.7	4.8	5.1	5.4	4.4	4.5	4.7	5.0	3.8	3.9	4.0	4.3	
		S/T	0.93	0.89	0.81	0.65	0.96	0.93	0.84	0.68	0.98	0.95	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.75	1.00	1.00	1.00	0.78	
	kW Input	1.62	1.66	1.71	1.77	1.75	1.79	1.85	1.92	1.87	1.91	1.98	2.05	1.97	2.02	2.09	2.16	2.06	2.11	2.18	2.26	2.14	2.19	2.26	2.34	2.31	2.36	2.44	2.53		

NAC018*W/EBW1800A

NET COOLING CAPACITY

Expanded Performance Data - COOLING CAPACITY

IDB	airflow CFM	F/C	CMH	Ambient Air Temperature Deg F/C Dry Bulb																											
				65 18				75 24				85 29				95 35				105 41				115 46				125 51			
				Entering Indoor Air Temperature WB Deg																											
Deg F	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71			
Deg C	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22			
70 21	579 984	MBh	16.6	17.2	18.8	-	16.2	16.8	18.4	-	15.8	16.4	17.9	-	15.4	16.0	17.5	-	14.6	15.2	16.6	-	13.6	14.0	15.4	-	11.7	12.1	13.2	-	
		kW Capacity	4.9	5.0	5.5	-	4.7	4.9	5.4	-	4.6	4.8	5.3	-	4.5	4.7	5.1	-	4.3	4.4	4.9	-	4.0	4.1	4.5	-	3.4	3.5	3.9	-	
		S/T	0.69	0.58	0.40	-	0.71	0.60	0.41	-	0.73	0.61	0.42	-	0.76	0.63	0.44	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	
		kW Input	1.54	1.57	1.63	-	1.67	1.71	1.77	-	1.78	1.82	1.89	-	1.88	1.93	1.99	-	1.97	2.01	2.08	-	2.04	2.09	2.16	-	2.20	2.25	2.33	-	
75 24	579 984	MBh	16.8	17.3	18.8	20.1	16.4	16.9	18.3	19.7	16.1	16.5	17.9	19.2	15.7	16.1	17.5	18.7	14.9	15.3	16.6	17.8	13.8	14.2	15.4	16.5	11.9	12.2	13.2	14.2	
		kW Capacity	4.9	5.1	5.5	5.9	4.8	5.0	5.4	5.8	4.7	4.8	5.2	5.6	4.6	4.7	5.1	5.5	4.4	4.5	4.9	5.2	4.0	4.2	4.5	4.8	3.5	3.6	3.9	4.2	
		S/T	0.78	0.70	0.53	0.34	0.81	0.73	0.55	0.35	0.83	0.75	0.56	0.36	0.86	0.77	0.58	0.37	0.89	0.80	0.60	0.39	0.90	0.81	0.61	0.39	1.00	1.00	0.64	0.42	
		kW Input	1.55	1.59	1.64	1.70	1.68	1.72	1.78	1.84	1.80	1.84	1.90	1.97	1.90	1.94	2.01	2.08	1.98	2.03	2.10	2.18	2.06	2.11	2.18	2.26	2.22	2.27	2.35	2.44	
80 27	579 984	MBh	17.1	17.5	18.7	20.0	16.7	17.1	18.3	19.5	16.3	16.7	17.8	19.1	15.9	16.3	17.4	18.6	15.1	15.5	16.5	17.7	14.0	14.3	15.3	16.4	12.1	12.3	13.2	14.1	
		kW Capacity	5.0	5.1	5.5	5.9	4.9	5.0	5.4	5.7	4.8	4.9	5.2	5.6	4.7	4.8	5.1	5.5	4.4	4.5	4.8	5.2	4.1	4.2	4.5	4.8	3.5	3.6	3.9	4.1	
		S/T	0.86	0.81	0.66	0.49	0.89	0.84	0.68	0.51	0.91	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.98	0.92	0.75	0.56	0.99	0.93	0.75	0.56	1.00	1.00	0.78	0.59	
		kW Input	1.57	1.60	1.66	1.72	1.70	1.74	1.80	1.86	1.81	1.86	1.92	1.99	1.92	1.96	2.03	2.10	2.00	2.05	2.12	2.20	2.08	2.13	2.20	2.28	2.24	2.29	2.38	2.46	
85 29	579 984	MBh	17.4	17.8	18.6	19.9	17.0	17.4	18.2	19.4	16.6	16.9	17.7	18.9	16.2	16.5	17.3	18.5	15.4	15.7	16.4	17.5	14.3	14.5	15.2	16.3	12.3	12.5	13.1	14.0	
		kW Capacity	5.1	5.2	5.5	5.8	5.0	5.1	5.3	5.7	4.9	5.0	5.2	5.5	4.8	4.8	5.1	5.4	4.5	4.6	4.8	5.1	4.2	4.3	4.5	4.8	3.6	3.7	3.8	4.1	
		S/T	0.90	0.87	0.79	0.64	0.93	0.90	0.81	0.66	0.96	0.92	0.83	0.68	0.99	0.95	0.86	0.70	1.00	0.99	0.89	0.73	1.00	1.00	0.90	0.73	1.00	1.00	1.00	0.76	
		kW Input	1.58	1.62	1.67	1.73	1.71	1.75	1.81	1.88	1.83	1.87	1.94	2.01	1.93	1.98	2.05	2.12	2.02	2.07	2.14	2.22	2.10	2.15	2.22	2.30	2.26	2.31	2.40	2.48	

NAC018*W/EBW2400A

NET COOLING CAPACITY

Expanded Performance Data - COOLING CAPACITY

IDB	airflow	F/C		Ambient Air Temperature Deg F/C Dry Bulb																											
				65				75				85				95				105				115				125			
				18				24				29				35				41				46				51			
CFM	CMH	Deg F	Deg C	Entering Indoor Air Temperature WB Deg																											
				59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
				15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22
70 21	731 1243	MBh	18.3	18.9	20.7	-	17.8	18.5	20.3	-	17.4	18.1	19.8	-	17.0	17.6	19.3	-	16.1	16.7	18.3	-	15.0	15.5	17.0	-	12.9	13.3	14.6	-	
		kW Capacity	5.4	5.5	6.1	-	5.2	5.4	5.9	-	5.1	5.3	5.8	-	5.0	5.2	5.7	-	4.7	4.9	5.4	-	4.4	4.5	5.0	-	3.8	3.9	4.3	-	
		S/T	0.76	0.63	0.44	-	0.78	0.66	0.45	-	0.80	0.67	0.47	-	0.83	0.69	0.48	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	
		kW Input	1.60	1.63	1.69	-	1.73	1.77	1.82	-	1.84	1.88	1.95	-	1.94	1.99	2.05	-	2.03	2.07	2.14	-	2.10	2.15	2.22	-	2.27	2.32	2.40	-	
75 24	731 1243	MBh	18.6	19.1	20.7	22.2	18.1	18.7	20.2	21.7	17.7	18.2	19.7	21.2	17.3	17.8	19.3	20.7	16.4	16.9	18.3	19.6	15.2	15.7	16.9	18.2	13.1	13.5	14.6	15.6	
		kW Capacity	5.4	5.6	6.1	6.5	5.3	5.5	5.9	6.4	5.2	5.3	5.8	6.2	5.1	5.2	5.6	6.1	4.8	5.0	5.4	5.8	4.5	4.6	5.0	5.3	3.8	3.9	4.3	4.6	
		S/T	0.86	0.77	0.58	0.37	0.89	0.80	0.60	0.39	0.91	0.82	0.62	0.40	0.94	0.84	0.64	0.41	0.98	0.88	0.66	0.43	0.99	0.88	0.67	0.43	1.00	1.00	0.70	0.46	
		kW Input	1.61	1.65	1.70	1.76	1.74	1.78	1.84	1.90	1.86	1.90	1.96	2.03	1.96	2.00	2.07	2.14	2.04	2.09	2.16	2.24	2.12	2.17	2.24	2.32	2.29	2.34	2.42	2.51	
80 27	731 1243	MBh	18.9	19.3	20.6	22.1	18.5	18.9	20.2	21.6	18.0	18.4	19.7	21.0	17.6	18.0	19.2	20.5	16.7	17.1	18.2	19.5	15.5	15.8	16.9	18.1	13.3	13.6	14.5	15.5	
		kW Capacity	5.5	5.7	6.0	6.5	5.4	5.5	5.9	6.3	5.3	5.4	5.8	6.2	5.2	5.3	5.6	6.0	4.9	5.0	5.3	5.7	4.5	4.6	5.0	5.3	3.9	4.0	4.3	4.6	
		S/T	0.94	0.88	0.72	0.54	0.98	0.92	0.75	0.56	1.00	0.94	0.77	0.57	1.00	0.97	0.79	0.59	1.00	1.00	0.82	0.61	1.00	1.00	0.83	0.62	1.00	1.00	0.86	0.65	
		kW Input	1.62	1.66	1.72	1.77	1.76	1.80	1.86	1.92	1.87	1.92	1.98	2.05	1.98	2.02	2.09	2.16	2.06	2.11	2.18	2.26	2.14	2.19	2.26	2.34	2.31	2.36	2.45	2.53	
85 29	731 1243	MBh	19.2	19.6	20.5	21.9	18.8	19.2	20.1	21.4	18.3	18.7	19.6	20.9	17.9	18.2	19.1	20.4	17.0	17.3	18.1	19.4	15.7	16.1	16.8	17.9	13.5	13.8	14.5	15.4	
		kW Capacity	5.6	5.7	6.0	6.4	5.5	5.6	5.9	6.3	5.4	5.5	5.7	6.1	5.2	5.3	5.6	6.0	5.0	5.1	5.3	5.7	4.6	4.7	4.9	5.3	4.0	4.0	4.2	4.5	
		S/T	0.99	0.95	0.86	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.74	1.00	1.00	0.94	0.77	1.00	1.00	0.98	0.80	1.00	1.00	0.99	0.80	1.00	1.00	1.00	0.83	
		kW Input	1.64	1.68	1.73	1.79	1.77	1.81	1.87	1.94	1.89	1.93	2.00	2.07	1.99	2.04	2.11	2.18	2.08	2.13	2.20	2.28	2.16	2.21	2.28	2.36	2.33	2.38	2.47	2.55	

NAC018*W/EBW2400A

NET COOLING CAPACITY

Expanded Performance Data - COOLING CAPACITY

IDB	airflow CFM	F/C	CMH	Ambient Air Temperature Deg F/C Dry Bulb																											
				65				75				85				95				105				115				125			
				18	18	18	18	24	24	24	24	29	29	29	29	35	35	35	35	41	41	41	41	46	46	46	46	51	51	51	51
Entering Indoor Air Temperature WB Deg																															
		Deg F	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
		Deg C	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	
70 21	677 1151	MBh	17.8	18.4	20.2	-	17.4	18.0	19.7	-	17.0	17.6	19.3	-	16.5	17.2	18.8	-	15.7	16.3	17.9	-	14.6	15.1	16.5	-	12.5	13.0	14.2	-	
		kW Capacity	5.2	5.4	5.9	-	5.1	5.3	5.8	-	5.0	5.2	5.6	-	4.9	5.0	5.5	-	4.6	4.8	5.2	-	4.3	4.4	4.8	-	3.7	3.8	4.2	-	
		S/T	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	
		kW Input	1.58	1.61	1.67	-	1.71	1.75	1.80	-	1.82	1.86	1.93	-	1.92	1.97	2.03	-	2.01	2.05	2.12	-	2.08	2.13	2.20	-	2.25	2.30	2.38	-	
75 24	677 1151	MBh	18.1	18.6	20.2	21.6	17.7	18.2	19.7	21.1	17.3	17.8	19.2	20.6	16.8	17.3	18.8	20.1	16.0	16.5	17.8	19.1	14.8	15.2	16.5	17.7	12.7	13.1	14.2	15.2	
		kW Capacity	5.3	5.5	5.9	6.3	5.2	5.3	5.8	6.2	5.1	5.2	5.6	6.0	4.9	5.1	5.5	5.9	4.7	4.8	5.2	5.6	4.3	4.5	4.8	5.2	3.7	3.8	4.2	4.5	
		S/T	0.82	0.73	0.55	0.36	0.85	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.94	0.84	0.63	0.41	1.00	1.00	0.66	0.44	
		kW Input	1.59	1.63	1.68	1.74	1.72	1.76	1.82	1.88	1.84	1.88	1.94	2.01	1.94	1.98	2.05	2.12	2.02	2.07	2.14	2.22	2.10	2.15	2.22	2.30	2.27	2.32	2.40	2.49	
80 27	677 1151	MBh	18.4	18.8	20.1	21.5	18.0	18.4	19.6	21.0	17.6	17.9	19.2	20.5	17.1	17.5	18.7	20.0	16.3	16.6	17.8	19.0	15.1	15.4	16.5	17.6	13.0	13.2	14.2	15.1	
		kW Capacity	5.4	5.5	5.9	6.3	5.3	5.4	5.8	6.2	5.1	5.3	5.6	6.0	5.0	5.1	5.5	5.9	4.8	4.9	5.2	5.6	4.4	4.5	4.8	5.2	3.8	3.9	4.1	4.4	
		S/T	0.90	0.84	0.68	0.51	0.93	0.87	0.71	0.53	0.95	0.89	0.73	0.54	0.98	0.92	0.75	0.56	1.00	0.96	0.78	0.58	1.00	0.96	0.78	0.59	1.00	1.00	0.81	0.62	
		kW Input	1.61	1.64	1.70	1.75	1.74	1.78	1.84	1.90	1.85	1.90	1.96	2.03	1.96	2.00	2.07	2.14	2.04	2.09	2.16	2.24	2.12	2.17	2.24	2.32	2.29	2.34	2.42	2.51	
85 29	677 1151	MBh	18.7	19.1	20.0	21.3	18.3	18.7	19.5	20.8	17.9	18.2	19.1	20.3	17.4	17.8	18.6	19.9	16.6	16.9	17.7	18.9	15.3	15.6	16.4	17.5	13.2	13.4	14.1	15.0	
		kW Capacity	5.5	5.6	5.9	6.3	5.4	5.5	5.7	6.1	5.2	5.3	5.6	6.0	5.1	5.2	5.5	5.8	4.9	4.9	5.2	5.5	4.5	4.6	4.8	5.1	3.9	3.9	4.1	4.4	
		S/T	0.94	0.91	0.82	0.66	0.97	0.94	0.85	0.69	1.00	0.96	0.87	0.71	1.00	0.99	0.90	0.73	1.00	1.00	0.93	0.76	1.00	1.00	0.94	0.76	1.00	1.00	1.00	0.79	
		kW Input	1.62	1.66	1.71	1.77	1.75	1.79	1.85	1.92	1.87	1.91	1.98	2.05	1.97	2.02	2.09	2.16	2.06	2.11	2.18	2.26	2.14	2.19	2.26	2.34	2.31	2.36	2.44	2.53	

NAC018*W/EBW2400A

NET COOLING CAPACITY

Expanded Performance Data - COOLING CAPACITY

IDB	airflow CFM	F/C	CMH	Ambient Air Temperature Deg F/C Dry Bulb																											
				65				75				85				95				105				115				125			
				18	18	18	18	24	24	24	24	29	29	29	29	35	35	35	35	41	41	41	41	46	46	46	46	51	51	51	51
Entering Indoor Air Temperature WB Deg																															
		Deg F	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
		Deg C	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	
70 21	677 1151	MBh	17.8	18.4	20.2	-	17.4	18.0	19.7	-	17.0	17.6	19.3	-	16.5	17.2	18.8	-	15.7	16.3	17.9	-	14.6	15.1	16.5	-	12.5	13.0	14.2	-	
		kW Capacity	5.2	5.4	5.9	-	5.1	5.3	5.8	-	5.0	5.2	5.6	-	4.9	5.0	5.5	-	4.6	4.8	5.2	-	4.3	4.4	4.8	-	3.7	3.8	4.2	-	
		S/T	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	
		kW Input	1.58	1.61	1.67	-	1.71	1.75	1.80	-	1.82	1.86	1.93	-	1.92	1.97	2.03	-	2.01	2.05	2.12	-	2.08	2.13	2.20	-	2.25	2.30	2.38	-	
75 24	677 1151	MBh	18.1	18.6	20.2	21.6	17.7	18.2	19.7	21.1	17.3	17.8	19.2	20.6	16.8	17.3	18.8	20.1	16.0	16.5	17.8	19.1	14.8	15.2	16.5	17.7	12.7	13.1	14.2	15.2	
		kW Capacity	5.3	5.5	5.9	6.3	5.2	5.3	5.8	6.2	5.1	5.2	5.6	6.0	4.9	5.1	5.5	5.9	4.7	4.8	5.2	5.6	4.3	4.5	4.8	5.2	3.7	3.8	4.2	4.5	
		S/T	0.82	0.73	0.55	0.36	0.85	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.94	0.84	0.63	0.41	1.00	1.00	0.66	0.44	
		kW Input	1.59	1.63	1.68	1.74	1.72	1.76	1.82	1.88	1.84	1.88	1.94	2.01	1.94	1.98	2.05	2.12	2.02	2.07	2.14	2.22	2.10	2.15	2.22	2.30	2.27	2.32	2.40	2.49	
80 27	677 1151	MBh	18.4	18.8	20.1	21.5	18.0	18.4	19.6	21.0	17.6	17.9	19.2	20.5	17.1	17.5	18.7	20.0	16.3	16.6	17.8	19.0	15.1	15.4	16.5	17.6	13.0	13.2	14.2	15.1	
		kW Capacity	5.4	5.5	5.9	6.3	5.3	5.4	5.8	6.2	5.1	5.3	5.6	6.0	5.0	5.1	5.5	5.9	4.8	4.9	5.2	5.6	4.4	4.5	4.8	5.2	3.8	3.9	4.1	4.4	
		S/T	0.90	0.84	0.68	0.51	0.93	0.87	0.71	0.53	0.95	0.89	0.73	0.54	0.98	0.92	0.75	0.56	1.00	0.96	0.78	0.58	1.00	0.96	0.78	0.59	1.00	1.00	0.81	0.62	
		kW Input	1.61	1.64	1.70	1.75	1.74	1.78	1.84	1.90	1.85	1.90	1.96	2.03	1.96	2.00	2.07	2.14	2.04	2.09	2.16	2.24	2.12	2.17	2.24	2.32	2.29	2.34	2.42	2.51	
85 29	677 1151	MBh	18.7	19.1	20.0	21.3	18.3	18.7	19.5	20.8	17.9	18.2	19.1	20.3	17.4	17.8	18.6	19.9	16.6	16.9	17.7	18.9	15.3	15.6	16.4	17.5	13.2	13.4	14.1	15.0	
		kW Capacity	5.5	5.6	5.9	6.3	5.4	5.5	5.7	6.1	5.2	5.3	5.6	6.0	5.1	5.2	5.5	5.8	4.9	4.9	5.2	5.5	4.5	4.6	4.8	5.1	3.9	3.9	4.1	4.4	
		S/T	0.94	0.91	0.82	0.66	0.97	0.94	0.85	0.69	1.00	0.96	0.87	0.71	1.00	0.99	0.90	0.73	1.00	1.00	0.93	0.76	1.00	1.00	0.94	0.76	1.00	1.00	1.00	0.79	
		kW Input	1.62	1.66	1.71	1.77	1.75	1.79	1.85	1.92	1.87	1.91	1.98	2.05	1.97	2.02	2.09	2.16	2.06	2.11	2.18	2.26	2.14	2.19	2.26	2.34	2.31	2.36	2.44	2.53	

NAC024*W/EBW2400A

NET COOLING CAPACITY

Expanded Performance Data - COOLING CAPACITY

IDB	airflow CFM	F/C	CMH	Ambient Air Temperature Deg F/C Dry Bulb																											
				65				75				85				95				105				115				125			
				18	18	18	18	24	24	24	24	29	29	29	29	35	35	35	35	41	41	41	41	46	46	46	46	51	51	51	51
Entering Indoor Air Temperature WB Deg																															
		Deg F	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
		Deg C	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	
70 21	731 1243	MBh	22.2	23.0	25.2	-	21.7	22.4	24.6	-	21.1	21.9	24.0	-	20.6	21.4	23.4	-	19.6	20.3	22.2	-	18.1	18.8	20.6	-	15.6	16.2	17.7	-	
		kW Capacity	6.5	6.7	7.4	-	6.3	6.6	7.2	-	6.2	6.4	7.0	-	6.0	6.3	6.9	-	5.7	6.0	6.5	-	5.3	5.5	6.0	-	4.6	4.7	5.2	-	
		S/T	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	
		kW Input	1.86	1.90	1.97	-	2.01	2.06	2.13	-	2.15	2.20	2.28	-	2.27	2.33	2.41	-	2.37	2.43	2.52	-	2.46	2.52	2.61	-	2.66	2.72	2.82	-	
75 24	731 1243	MBh	22.5	23.2	25.1	27.0	22.0	22.7	24.5	26.3	21.5	22.1	24.0	25.7	21.0	21.6	23.4	25.1	19.9	20.5	22.2	23.8	18.5	19.0	20.6	22.1	15.9	16.3	17.7	19.0	
		kW Capacity	6.6	6.8	7.4	7.9	6.5	6.6	7.2	7.7	6.3	6.5	7.0	7.5	6.1	6.3	6.8	7.4	5.8	6.0	6.5	7.0	5.4	5.6	6.0	6.5	4.7	4.8	5.2	5.6	
		S/T	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.89	0.80	0.60	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.65	0.42	0.96	0.86	0.65	0.42	1.00	1.00	0.68	0.45	
		kW Input	1.88	1.92	1.99	2.05	2.03	2.08	2.15	2.23	2.17	2.22	2.30	2.38	2.29	2.35	2.43	2.51	2.40	2.45	2.54	2.63	2.48	2.54	2.63	2.73	2.68	2.74	2.84	2.94	
80 27	731 1243	MBh	22.9	23.4	25.0	26.8	22.4	22.9	24.5	26.2	21.9	22.4	23.9	25.5	21.3	21.8	23.3	24.9	20.3	20.7	22.1	23.7	18.8	19.2	20.5	21.9	16.2	16.5	17.6	18.9	
		kW Capacity	6.7	6.9	7.3	7.8	6.6	6.7	7.2	7.7	6.4	6.6	7.0	7.5	6.3	6.4	6.8	7.3	5.9	6.1	6.5	6.9	5.5	5.6	6.0	6.4	4.7	4.8	5.2	5.5	
		S/T	0.92	0.86	0.70	0.52	0.95	0.89	0.73	0.54	0.98	0.92	0.75	0.56	1.00	0.95	0.77	0.58	1.00	0.98	0.80	0.60	1.00	0.99	0.81	0.60	1.00	1.00	0.84	0.63	
		kW Input	1.89	1.94	2.00	2.07	2.05	2.10	2.17	2.25	2.19	2.24	2.32	2.40	2.31	2.37	2.45	2.54	2.42	2.47	2.56	2.65	2.51	2.57	2.66	2.75	2.71	2.77	2.87	2.97	
85 29	731 1243	MBh	23.3	23.8	24.9	26.6	22.8	23.2	24.3	26.0	22.3	22.7	23.8	25.4	21.7	22.1	23.2	24.7	20.6	21.0	22.0	23.5	19.1	19.5	20.4	21.8	16.4	16.8	17.5	18.7	
		kW Capacity	6.8	7.0	7.3	7.8	6.7	6.8	7.1	7.6	6.5	6.7	7.0	7.4	6.4	6.5	6.8	7.2	6.0	6.2	6.5	6.9	5.6	5.7	6.0	6.4	4.8	4.9	5.1	5.5	
		S/T	0.96	0.93	0.84	0.68	1.00	0.96	0.87	0.71	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.96	0.78	1.00	1.00	1.00	0.81	
		kW Input	1.91	1.95	2.02	2.09	2.07	2.12	2.19	2.27	2.21	2.26	2.34	2.42	2.33	2.39	2.47	2.56	2.44	2.50	2.58	2.68	2.53	2.59	2.68	2.78	2.73	2.79	2.89	3.00	

NAC024*W/EBW2400A

NET COOLING CAPACITY

Expanded Performance Data - COOLING CAPACITY

IDB	airflow CFM	F/C	CMH	Ambient Air Temperature Deg F/C Dry Bulb																											
				65				75				85				95				105				115				125			
				18	18	18	18	24	24	24	24	29	29	29	29	35	35	35	35	41	41	41	41	46	46	46	46	51	51	51	51
Entering Indoor Air Temperature WB Deg																															
		Deg F	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
		Deg C	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	
70 21	677 1151	MBh	21.4	22.2	24.3	-	20.9	21.7	23.7	-	20.4	21.2	23.2	-	19.9	20.6	22.6	-	18.9	19.6	21.5	-	17.5	18.2	19.9	-	15.1	15.6	17.1	-	
		kW Capacity	6.3	6.5	7.1	-	6.1	6.4	7.0	-	6.0	6.2	6.8	-	5.8	6.0	6.6	-	5.5	5.7	6.3	-	5.1	5.3	5.8	-	4.4	4.6	5.0	-	
		S/T	0.70	0.58	0.40	-	0.72	0.61	0.42	-	0.74	0.62	0.43	-	0.77	0.64	0.44	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	
		kW Input	1.84	1.88	1.95	-	1.99	2.04	2.11	-	2.13	2.18	2.26	-	2.25	2.31	2.39	-	2.35	2.41	2.50	-	2.44	2.50	2.59	-	2.63	2.70	2.79	-	
75 24	677 1151	MBh	21.8	22.4	24.3	26.0	21.3	21.9	23.7	25.4	20.8	21.4	23.1	24.8	20.3	20.8	22.6	24.2	19.2	19.8	21.4	23.0	17.8	18.3	19.9	21.3	15.3	15.8	17.1	18.3	
		kW Capacity	6.4	6.6	7.1	7.6	6.2	6.4	6.9	7.5	6.1	6.3	6.8	7.3	5.9	6.1	6.6	7.1	5.6	5.8	6.3	6.7	5.2	5.4	5.8	6.2	4.5	4.6	5.0	5.4	
		S/T	0.79	0.71	0.54	0.35	0.82	0.74	0.56	0.36	0.84	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.91	0.82	0.62	0.40	1.00	1.00	0.65	0.43	
		kW Input	1.86	1.90	1.97	2.03	2.01	2.06	2.13	2.21	2.15	2.20	2.28	2.36	2.27	2.33	2.41	2.49	2.38	2.43	2.52	2.61	2.46	2.52	2.61	2.71	2.66	2.72	2.82	2.92	
80 27	677 1151	MBh	22.2	22.6	24.2	25.9	21.6	22.1	23.6	25.3	21.1	21.6	23.1	24.7	20.6	21.1	22.5	24.1	19.6	20.0	21.4	22.8	18.1	18.5	19.8	21.2	15.6	15.9	17.0	18.2	
		kW Capacity	6.5	6.6	7.1	7.6	6.3	6.5	6.9	7.4	6.2	6.3	6.8	7.2	6.0	6.2	6.6	7.0	5.7	5.9	6.3	6.7	5.3	5.4	5.8	6.2	4.6	4.7	5.0	5.3	
		S/T	0.87	0.82	0.67	0.50	0.90	0.85	0.69	0.52	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	0.99	0.93	0.76	0.57	1.00	0.94	0.76	0.57	1.00	1.00	0.79	0.60	
		kW Input	1.87	1.92	1.98	2.05	2.03	2.08	2.15	2.23	2.17	2.22	2.30	2.38	2.29	2.35	2.43	2.52	2.40	2.45	2.54	2.63	2.49	2.55	2.64	2.73	2.68	2.75	2.84	2.95	
85 29	677 1151	MBh	22.5	23.0	24.1	25.7	22.0	22.4	23.5	25.1	21.5	21.9	22.9	24.5	21.0	21.4	22.4	23.9	19.9	20.3	21.3	22.7	18.5	18.8	19.7	21.0	15.9	16.2	16.9	18.1	
		kW Capacity	6.6	6.7	7.1	7.5	6.5	6.6	6.9	7.4	6.3	6.4	6.7	7.2	6.1	6.3	6.6	7.0	5.8	6.0	6.2	6.7	5.4	5.5	5.8	6.2	4.7	4.7	5.0	5.3	
		S/T	0.91	0.88	0.80	0.65	0.95	0.91	0.82	0.67	0.97	0.94	0.85	0.69	1.00	0.97	0.87	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.91	0.74	1.00	1.00	1.00	0.77	
		kW Input	1.89	1.93	2.00	2.07	2.05	2.10	2.17	2.25	2.19	2.24	2.32	2.40	2.31	2.37	2.45	2.54	2.42	2.48	2.56	2.66	2.51	2.57	2.66	2.76	2.71	2.77	2.87	2.97	

NAC024*W/EBW2400A

NET COOLING CAPACITY

Expanded Performance Data - COOLING CAPACITY

IDB	airflow CFM	F/C		Ambient Air Temperature Deg F/C Dry Bulb																											
				65				75				85				95				105				115				125			
				18				24				29				35				41				46				51			
Entering Indoor Air Temperature WB Deg																															
		Deg F	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
		Deg C	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	
70 21	523 889	MBh	20.2	20.9	22.9	-	19.7	20.4	22.4	-	19.2	19.9	21.8	-	18.8	19.4	21.3	-	17.8	18.5	20.2	-	16.5	17.1	18.7	-	14.2	14.7	16.1	-	
		kW Capacity	5.9	6.1	6.7	-	5.8	6.0	6.6	-	5.6	5.8	6.4	-	5.5	5.7	6.2	-	5.2	5.4	5.9	-	4.8	5.0	5.5	-	4.2	4.3	4.7	-	
		S/T	0.69	0.58	0.40	-	0.71	0.60	0.41	-	0.73	0.61	0.42	-	0.76	0.63	0.44	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	
		kW Input	1.82	1.86	1.93	-	1.98	2.02	2.10	-	2.11	2.17	2.24	-	2.24	2.29	2.38	-	2.34	2.40	2.49	-	2.43	2.49	2.58	-	2.62	2.68	2.78	-	
75 24	523 889	MBh	20.5	21.1	22.9	24.5	20.0	20.6	22.3	24.0	19.6	20.1	21.8	23.4	19.1	19.6	21.3	22.8	18.1	18.7	20.2	21.7	16.8	17.3	18.7	20.1	14.4	14.9	16.1	17.3	
		kW Capacity	6.0	6.2	6.7	7.2	5.9	6.0	6.5	7.0	5.7	5.9	6.4	6.9	5.6	5.8	6.2	6.7	5.3	5.5	5.9	6.4	4.9	5.1	5.5	5.9	4.2	4.4	4.7	5.1	
		S/T	0.78	0.70	0.53	0.34	0.81	0.73	0.55	0.35	0.83	0.75	0.56	0.36	0.86	0.77	0.58	0.37	0.89	0.80	0.60	0.39	0.90	0.81	0.61	0.39	1.00	1.00	0.64	0.42	
		kW Input	1.83	1.88	1.95	2.02	1.99	2.04	2.12	2.19	2.13	2.19	2.27	2.35	2.26	2.31	2.40	2.49	2.36	2.42	2.51	2.60	2.46	2.52	2.61	2.70	2.64	2.71	2.81	2.91	
80 27	523 889	MBh	20.9	21.3	22.8	24.4	20.4	20.8	22.3	23.8	19.9	20.3	21.7	23.2	19.4	19.8	21.2	22.7	18.4	18.9	20.1	21.5	17.1	17.5	18.7	19.9	14.7	15.0	16.0	17.2	
		kW Capacity	6.1	6.3	6.7	7.1	6.0	6.1	6.5	7.0	5.8	6.0	6.4	6.8	5.7	5.8	6.2	6.6	5.4	5.5	5.9	6.3	5.0	5.1	5.5	5.8	4.3	4.4	4.7	5.0	
		S/T	0.86	0.81	0.66	0.49	0.89	0.84	0.68	0.51	0.91	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.98	0.92	0.75	0.56	0.99	0.93	0.75	0.56	1.00	1.00	0.78	0.59	
		kW Input	1.85	1.90	1.96	2.03	2.01	2.06	2.13	2.21	2.15	2.21	2.29	2.37	2.28	2.34	2.42	2.51	2.39	2.44	2.53	2.63	2.48	2.54	2.63	2.73	2.67	2.73	2.83	2.94	
85 29	523 889	MBh	21.2	21.7	22.7	24.2	20.7	21.1	22.1	23.6	20.3	20.6	21.6	23.1	19.8	20.1	21.1	22.5	18.8	19.1	20.0	21.4	17.4	17.7	18.6	19.8	15.0	15.2	16.0	17.0	
		kW Capacity	6.2	6.3	6.6	7.1	6.1	6.2	6.5	6.9	5.9	6.1	6.3	6.8	5.8	5.9	6.2	6.6	5.5	5.6	5.9	6.3	5.1	5.2	5.4	5.8	4.4	4.5	4.7	5.0	
		S/T	0.90	0.87	0.79	0.64	0.93	0.90	0.81	0.66	0.96	0.92	0.83	0.68	0.99	0.95	0.86	0.70	1.00	0.99	0.89	0.73	1.00	1.00	0.90	0.73	1.00	1.00	1.00	0.76	
		kW Input	1.87	1.91	1.98	2.05	2.03	2.08	2.15	2.23	2.17	2.23	2.31	2.39	2.30	2.36	2.44	2.53	2.41	2.47	2.56	2.65	2.50	2.56	2.66	2.75	2.69	2.76	2.86	2.96	

NAC024*W/EBW3000A

NET COOLING CAPACITY

Expanded Performance Data - COOLING CAPACITY

IDB	airflow CFM	F/C	CMH	Ambient Air Temperature Deg F/C Dry Bulb																											
				65 18				75 24				85 29				95 35				105 41				115 46				125 51			
				Entering Indoor Air Temperature WB Deg																											
Deg F	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71			
Deg C	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22			
70 21	1022 1737	MBh	24.2	25.0	27.4	-	23.6	24.5	26.8	-	23.0	23.9	26.2	-	22.5	23.3	25.5	-	21.4	22.1	24.3	-	19.8	20.5	22.5	-	17.0	17.6	19.3	-	
		kW Capacity	7.1	7.3	8.0	-	6.9	7.2	7.9	-	6.8	7.0	7.7	-	6.6	6.8	7.5	-	6.3	6.5	7.1	-	5.8	6.0	6.6	-	5.0	5.2	5.7	-	
		S/T	0.82	0.69	0.48	-	0.85	0.71	0.49	-	0.88	0.73	0.51	-	0.90	0.75	0.52	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	
		kW Input	1.92	1.96	2.02	-	2.07	2.11	2.18	-	2.20	2.25	2.32	-	2.32	2.37	2.45	-	2.42	2.47	2.55	-	2.50	2.56	2.64	-	2.71	2.77	2.86	-	
75 24	1022 1737	MBh	24.6	25.3	27.4	29.4	24.0	24.7	26.8	28.7	23.4	24.1	26.1	28.0	22.9	23.5	25.5	27.3	21.7	22.4	24.2	26.0	20.1	20.7	22.4	24.1	17.3	17.8	19.3	20.7	
		kW Capacity	7.2	7.4	8.0	8.6	7.0	7.2	7.8	8.4	6.9	7.1	7.7	8.2	6.7	6.9	7.5	8.0	6.4	6.6	7.1	7.6	5.9	6.1	6.6	7.1	5.1	5.2	5.7	6.1	
		S/T	0.94	0.84	0.63	0.41	0.97	0.87	0.66	0.42	1.00	0.89	0.67	0.43	1.00	0.92	0.70	0.45	1.00	0.95	0.72	0.46	1.00	0.96	0.73	0.47	1.00	1.00	0.76	0.50	
		kW Input	1.93	1.98	2.04	2.11	2.09	2.13	2.20	2.27	2.22	2.27	2.42	2.34	2.39	2.47	2.55	2.44	2.49	2.58	2.66	2.52	2.52	2.58	2.67	2.76	2.73	2.80	2.89	2.99	
80 27	1022 1737	MBh	25.0	25.6	27.3	29.2	24.4	25.0	26.7	28.5	23.8	24.4	26.0	27.8	23.3	23.8	25.4	27.2	22.1	22.6	24.1	25.8	20.5	20.9	22.4	23.9	17.6	18.0	19.2	20.6	
		kW Capacity	7.3	7.5	8.0	8.6	7.2	7.3	7.8	8.4	7.0	7.1	7.6	8.2	6.8	7.0	7.4	8.0	6.5	6.6	7.1	7.6	6.0	6.1	6.6	7.0	5.2	5.3	5.6	6.0	
		S/T	1.00	0.96	0.78	0.59	1.00	1.00	0.81	0.61	1.00	1.00	0.83	0.62	1.00	1.00	0.86	0.64	1.00	1.00	0.89	0.67	1.00	1.00	0.90	0.67	1.00	1.00	0.93	0.70	
		kW Input	1.95	1.99	2.06	2.12	2.10	2.15	2.22	2.29	2.24	2.29	2.36	2.44	2.36	2.41	2.49	2.57	2.46	2.51	2.60	2.69	2.55	2.60	2.69	2.78	2.76	2.82	2.91	3.01	
85 29	1022 1737	MBh	25.4	25.9	27.2	29.0	24.9	25.3	26.5	28.3	24.3	24.7	25.9	27.6	23.7	24.1	25.3	27.0	22.5	22.9	24.0	25.6	20.8	21.2	22.2	23.7	17.9	18.3	19.1	20.4	
		kW Capacity	7.5	7.6	8.0	8.5	7.3	7.4	7.8	8.3	7.1	7.2	7.6	8.1	6.9	7.1	7.4	7.9	6.6	6.7	7.0	7.5	6.1	6.2	6.5	7.0	5.3	5.4	5.6	6.0	
		S/T	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.79	1.00	1.00	1.00	0.81	1.00	1.00	1.00	0.83	1.00	1.00	1.00	0.87	1.00	1.00	1.00	0.87	1.00	1.00	1.00	0.90	
		kW Input	1.97	2.01	2.07	2.14	2.12	2.17	2.24	2.31	2.26	2.31	2.38	2.46	2.38	2.43	2.51	2.60	2.48	2.53	2.62	2.71	2.57	2.63	2.71	2.81	2.78	2.84	2.94	3.04	

NAC024*W/EBW3000A

NET COOLING CAPACITY

Expanded Performance Data - COOLING CAPACITY

IDB	airflow CFM	F/C	CMH	Ambient Air Temperature Deg F/C Dry Bulb																											
				65 18				75 24				85 29				95 35				105 41				115 46				125 51			
				Entering Indoor Air Temperature WB Deg																											
Deg F	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71			
Deg C	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22			
70 21	910 1547	MBh	23.0	23.9	26.1	-	22.5	23.3	25.5	-	22.0	22.8	24.9	-	21.4	22.2	24.3	-	20.3	21.1	23.1	-	18.8	19.5	21.4	-	16.2	16.8	18.4	-	
		kW Capacity	6.7	7.0	7.7	-	6.6	6.8	7.5	-	6.4	6.7	7.3	-	6.3	6.5	7.1	-	6.0	6.2	6.8	-	5.5	5.7	6.3	-	4.8	4.9	5.4	-	
		S/T	0.79	0.66	0.45	-	0.81	0.68	0.47	-	0.83	0.70	0.48	-	0.86	0.72	0.50	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	
		kW Input	1.89	1.93	2.00	-	2.04	2.09	2.16	-	2.18	2.23	2.30	-	2.30	2.35	2.43	-	2.40	2.45	2.53	-	2.48	2.54	2.63	-	2.69	2.75	2.84	-	
75 24	910 1547	MBh	23.4	24.1	26.1	28.0	22.9	23.5	25.5	27.4	22.3	23.0	24.9	26.7	21.8	22.4	24.3	26.1	20.7	21.3	23.1	24.7	19.2	19.7	21.4	22.9	16.5	17.0	18.4	19.7	
		kW Capacity	6.9	7.1	7.6	8.2	6.7	6.9	7.5	8.0	6.5	6.7	7.3	7.8	6.4	6.6	7.1	7.6	6.1	6.2	6.8	7.3	5.6	5.8	6.3	6.7	4.8	5.0	5.4	5.8	
		S/T	0.89	0.80	0.60	0.39	0.93	0.83	0.63	0.40	0.95	0.85	0.64	0.41	0.98	0.88	0.66	0.43	1.00	0.91	0.69	0.44	1.00	0.92	0.69	0.45	1.00	1.00	0.72	0.48	
		kW Input	1.91	1.95	2.01	2.08	2.06	2.11	2.18	2.25	2.20	2.25	2.32	2.40	2.32	2.37	2.45	2.53	2.42	2.47	2.56	2.65	2.50	2.56	2.65	2.74	2.71	2.77	2.86	2.96	
80 27	910 1547	MBh	23.8	24.4	26.0	27.8	23.3	23.8	25.4	27.2	22.7	23.2	24.8	26.5	22.2	22.7	24.2	25.9	21.1	21.5	23.0	24.6	19.5	19.9	21.3	22.8	16.8	17.1	18.3	19.6	
		kW Capacity	7.0	7.1	7.6	8.2	6.8	7.0	7.4	8.0	6.7	6.8	7.3	7.8	6.5	6.6	7.1	7.6	6.2	6.3	6.7	7.2	5.7	5.8	6.2	6.7	4.9	5.0	5.4	5.7	
		S/T	0.98	0.92	0.75	0.56	1.00	0.95	0.77	0.58	1.00	0.98	0.79	0.59	1.00	1.00	0.82	0.61	1.00	1.00	0.85	0.64	1.00	1.00	0.86	0.64	1.00	1.00	0.89	0.67	
		kW Input	1.92	1.97	2.03	2.10	2.08	2.13	2.20	2.27	2.22	2.27	2.34	2.42	2.34	2.39	2.47	2.56	2.44	2.49	2.58	2.67	2.53	2.58	2.67	2.77	2.73	2.79	2.89	2.99	
85 29	910 1547	MBh	24.2	24.7	25.9	27.6	23.7	24.1	25.3	27.0	23.1	23.6	24.7	26.3	22.6	23.0	24.1	25.7	21.4	21.8	22.9	24.4	19.8	20.2	21.2	22.6	17.1	17.4	18.2	19.4	
		kW Capacity	7.1	7.2	7.6	8.1	6.9	7.1	7.4	7.9	6.8	6.9	7.2	7.7	6.6	6.7	7.1	7.5	6.3	6.4	6.7	7.2	5.8	5.9	6.2	6.6	5.0	5.1	5.3	5.7	
		S/T	1.00	0.99	0.89	0.73	1.00	1.00	0.93	0.75	1.00	1.00	0.95	0.77	1.00	1.00	0.98	0.80	1.00	1.00	1.00	0.83	1.00	1.00	1.00	0.83	1.00	1.00	1.00	0.86	
		kW Input	1.94	1.98	2.05	2.12	2.10	2.14	2.21	2.29	2.23	2.28	2.36	2.44	2.36	2.41	2.49	2.58	2.46	2.52	2.60	2.69	2.55	2.61	2.70	2.79	2.76	2.82	2.91	3.02	

NAC024*W/EBW3000A

NET COOLING CAPACITY

Expanded Performance Data - COOLING CAPACITY

IDB	airflow CFM	F/C		Ambient Air Temperature Deg F/C Dry Bulb																											
				65				75				85				95				105				115				125			
				18				24				29				35				41				46				51			
Entering Indoor Air Temperature WB Deg																															
			Deg F	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
			Deg C	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22
70 21	818 1391	MBh	22.4	23.2	25.4	-	21.8	22.6	24.8	-	21.3	22.1	24.2	-	20.8	21.6	23.6	-	19.8	20.5	22.4	-	18.3	19.0	20.8	-	15.7	16.3	17.9	-	
		kW Capacity	6.6	6.8	7.4	-	6.4	6.6	7.3	-	6.2	6.5	7.1	-	6.1	6.3	6.9	-	5.8	6.0	6.6	-	5.4	5.6	6.1	-	4.6	4.8	5.2	-	
		S/T	0.75	0.62	0.43	-	0.77	0.65	0.45	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	
		kW Input	1.87	1.91	1.97	-	2.02	2.07	2.14	-	2.16	2.21	2.28	-	2.27	2.33	2.41	-	2.37	2.43	2.51	-	2.46	2.52	2.61	-	2.66	2.72	2.82	-	
75 24	818 1391	MBh	22.7	23.4	25.3	27.2	22.2	22.9	24.7	26.6	21.7	22.3	24.2	25.9	21.2	21.8	23.6	25.3	20.1	20.7	22.4	24.0	18.6	19.2	20.7	22.3	16.0	16.5	17.8	19.2	
		kW Capacity	6.7	6.9	7.4	8.0	6.5	6.7	7.3	7.8	6.4	6.5	7.1	7.6	6.2	6.4	6.9	7.4	5.9	6.1	6.6	7.0	5.5	5.6	6.1	6.5	4.7	4.8	5.2	5.6	
		S/T	0.85	0.76	0.57	0.37	0.88	0.79	0.60	0.38	0.90	0.81	0.61	0.39	0.93	0.83	0.63	0.41	0.97	0.86	0.65	0.42	0.98	0.87	0.66	0.42	1.00	1.00	0.69	0.45	
		kW Input	1.89	1.93	1.99	2.06	2.04	2.09	2.16	2.23	2.17	2.22	2.30	2.38	2.29	2.35	2.43	2.51	2.40	2.45	2.54	2.63	2.48	2.54	2.63	2.72	2.68	2.75	2.84	2.94	
80 27	818 1391	MBh	23.1	23.6	25.3	27.0	22.6	23.1	24.7	26.4	22.1	22.5	24.1	25.7	21.5	22.0	23.5	25.1	20.4	20.9	22.3	23.9	18.9	19.4	20.7	22.1	16.3	16.7	17.8	19.0	
		kW Capacity	6.8	6.9	7.4	7.9	6.6	6.8	7.2	7.7	6.5	6.6	7.1	7.5	6.3	6.4	6.9	7.4	6.0	6.1	6.5	7.0	5.6	5.7	6.1	6.5	4.8	4.9	5.2	5.6	
		S/T	0.93	0.87	0.71	0.53	0.97	0.91	0.74	0.55	0.99	0.93	0.76	0.56	1.00	0.96	0.78	0.58	1.00	0.99	0.81	0.61	1.00	1.00	0.82	0.61	1.00	1.00	0.85	0.64	
		kW Input	1.90	1.94	2.01	2.08	2.06	2.10	2.17	2.25	2.19	2.24	2.32	2.40	2.31	2.37	2.45	2.54	2.42	2.47	2.56	2.65	2.51	2.56	2.65	2.75	2.71	2.77	2.87	2.97	
85 29	818 1391	MBh	23.5	24.0	25.1	26.8	23.0	23.4	24.6	26.2	22.4	22.9	24.0	25.6	21.9	22.3	23.4	24.9	20.8	21.2	22.2	23.7	19.3	19.6	20.6	22.0	16.6	16.9	17.7	18.9	
		kW Capacity	6.9	7.0	7.4	7.9	6.7	6.9	7.2	7.7	6.6	6.7	7.0	7.5	6.4	6.5	6.9	7.3	6.1	6.2	6.5	6.9	5.6	5.8	6.0	6.4	4.9	5.0	5.2	5.5	
		S/T	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.72	1.00	1.00	0.90	0.73	1.00	1.00	0.93	0.76	1.00	1.00	0.97	0.79	1.00	1.00	0.98	0.79	1.00	1.00	1.00	0.82	
		kW Input	1.92	1.96	2.03	2.10	2.07	2.12	2.19	2.27	2.21	2.26	2.34	2.42	2.33	2.39	2.47	2.56	2.44	2.50	2.58	2.67	2.53	2.59	2.68	2.77	2.73	2.80	2.89	2.99	

NAC036*W/EBW3600A

NET COOLING CAPACITY

Expanded Performance Data - COOLING CAPACITY

IDB	airflow CFM	F/C		Ambient Air Temperature Deg F/C Dry Bulb																											
				65 18				75 24				85 29				95 35				105 41				115 46				125 51			
				Entering Indoor Air Temperature WB Deg																											
	Deg F	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
	Deg C	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22		
70 21	1210 2057	MBh	33.1	34.3	37.6	-	32.3	33.5	36.7	-	31.6	32.7	35.8	-	30.8	31.9	35.0	-	29.3	30.3	33.2	-	27.1	28.1	30.8	-	23.3	24.2	26.5	-	
		kW Capacity	9.7	10.1	11.0	-	9.5	9.8	10.8	-	9.3	9.6	10.5	-	9.0	9.4	10.3	-	8.6	8.9	9.7	-	7.9	8.2	9.0	-	6.8	7.1	7.8	-	
		S/T	0.80	0.66	0.46	-	0.82	0.69	0.48	-	0.84	0.71	0.49	-	0.87	0.73	0.50	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	
	kW Input	2.97	3.03	3.14	-	3.21	3.28	3.40	-	3.43	3.51	3.63	-	3.62	3.70	3.83	-	3.78	3.87	4.00	-	3.92	4.01	4.15	-	4.23	4.33	4.48	-		
75 24	1210 2057	MBh	33.7	34.7	37.5	40.3	32.9	33.9	36.6	39.3	32.1	33.1	35.8	38.4	31.3	32.2	34.9	37.5	29.8	30.6	33.2	35.6	27.6	28.4	30.7	33.0	23.7	24.4	26.4	28.4	
		kW Capacity	9.9	10.2	11.0	11.8	9.6	9.9	10.7	11.5	9.4	9.7	10.5	11.3	9.2	9.5	10.2	11.0	8.7	9.0	9.7	10.4	8.1	8.3	9.0	9.7	6.9	7.2	7.7	8.3	
		S/T	0.90	0.81	0.61	0.39	0.94	0.84	0.63	0.41	0.96	0.86	0.65	0.42	0.99	0.89	0.67	0.43	1.00	0.92	0.70	0.45	1.00	0.93	0.70	0.45	1.00	1.00	0.73	0.48	
	kW Input	2.99	3.06	3.16	3.27	3.24	3.31	3.43	3.55	3.46	3.54	3.66	3.79	3.65	3.74	3.87	4.00	3.81	3.90	4.04	4.18	3.95	4.05	4.19	4.34	4.27	4.37	4.52	4.68		
80 27	1210 2057	MBh	34.3	35.0	37.4	40.0	33.5	34.2	36.5	39.1	32.7	33.4	35.7	38.1	31.9	32.6	34.8	37.2	30.3	30.9	33.1	35.3	28.1	28.7	30.6	32.7	24.1	24.7	26.3	28.2	
		kW Capacity	10.0	10.3	11.0	11.7	9.8	10.0	10.7	11.4	9.6	9.8	10.5	11.2	9.3	9.5	10.2	10.9	8.9	9.1	9.7	10.4	8.2	8.4	9.0	9.6	7.1	7.2	7.7	8.3	
		S/T	0.99	0.93	0.76	0.57	1.00	0.96	0.78	0.59	1.00	0.99	0.80	0.60	1.00	1.00	0.83	0.62	1.00	1.00	0.86	0.64	1.00	1.00	0.87	0.65	1.00	1.00	0.90	0.68	
	kW Input	3.02	3.09	3.19	3.30	3.27	3.34	3.46	3.58	3.49	3.57	3.69	3.82	3.68	3.77	3.90	4.04	3.85	3.94	4.08	4.22	3.99	4.08	4.23	4.38	4.31	4.41	4.56	4.72		
85 29	1210 2057	MBh	34.9	35.5	37.2	39.7	34.1	34.7	36.4	38.8	33.2	33.9	35.5	37.9	32.4	33.1	34.6	36.9	30.8	31.4	32.9	35.1	28.5	29.1	30.5	32.5	24.6	25.0	26.2	28.0	
		kW Capacity	10.2	10.4	10.9	11.6	10.0	10.2	10.7	11.4	9.7	9.9	10.4	11.1	9.5	9.7	10.1	10.8	9.0	9.2	9.6	10.3	8.4	8.5	8.9	9.5	7.2	7.3	7.7	8.2	
		S/T	1.00	1.00	0.90	0.73	1.00	1.00	0.94	0.76	1.00	1.00	0.96	0.78	1.00	1.00	0.99	0.81	1.00	1.00	1.00	0.84	1.00	1.00	1.00	0.84	1.00	1.00	1.00	0.87	
	kW Input	3.04	3.11	3.22	3.33	3.30	3.37	3.49	3.61	3.52	3.60	3.73	3.86	3.71	3.80	3.93	4.07	3.88	3.97	4.11	4.26	4.03	4.12	4.27	4.42	4.35	4.45	4.60	4.77		

NAC036*W/EBW3600A

NET COOLING CAPACITY

Expanded Performance Data - COOLING CAPACITY

IDB	airflow CFM	F/C	CMH	Ambient Air Temperature Deg F/C Dry Bulb																											
				65 18				75 24				85 29				95 35				105 41				115 46				125 51			
				Entering Indoor Air Temperature WB Deg																											
Deg F	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71			
Deg C	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22			
70 21	1058 1799	MBh	32.2	33.3	36.5	-	31.4	32.6	35.7	-	30.7	31.8	34.8	-	29.9	31.0	34.0	-	28.4	29.5	32.3	-	26.3	27.3	29.9	-	22.6	23.5	25.7	-	
		kW Capacity	9.4	9.8	10.7	-	9.2	9.5	10.5	-	9.0	9.3	10.2	-	8.8	9.1	10.0	-	8.3	8.6	9.5	-	7.7	8.0	8.8	-	6.6	6.9	7.5	-	
		S/T	0.76	0.63	0.44	-	0.78	0.66	0.45	-	0.80	0.67	0.47	-	0.83	0.69	0.48	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	
		kW Input	2.94	3.00	3.11	-	3.18	3.26	3.37	-	3.40	3.48	3.60	-	3.59	3.68	3.81	-	3.76	3.85	3.98	-	3.90	3.99	4.14	-	4.21	4.31	4.46	-	
75 24	1058 1799	MBh	32.7	33.7	36.4	39.1	31.9	32.9	35.6	38.2	31.2	32.1	34.7	37.3	30.4	31.3	33.9	36.4	28.9	29.8	32.2	34.6	26.8	27.6	29.8	32.0	23.0	23.7	25.7	27.5	
		kW Capacity	9.6	9.9	10.7	11.5	9.4	9.6	10.4	11.2	9.1	9.4	10.2	10.9	8.9	9.2	9.9	10.7	8.5	8.7	9.4	10.1	7.8	8.1	8.7	9.4	6.7	6.9	7.5	8.1	
		S/T	0.86	0.77	0.58	0.37	0.89	0.80	0.60	0.39	0.91	0.82	0.62	0.40	0.94	0.84	0.64	0.41	0.98	0.88	0.66	0.43	0.99	0.88	0.67	0.43	1.00	1.00	0.70	0.46	
		kW Input	2.96	3.03	3.14	3.25	3.21	3.29	3.40	3.52	3.43	3.51	3.64	3.77	3.63	3.71	3.85	3.98	3.79	3.88	4.02	4.17	3.94	4.03	4.17	4.33	4.24	4.34	4.50	4.66	
80 27	1058 1799	MBh	33.3	34.0	36.3	38.8	32.5	33.2	35.5	37.9	31.7	32.4	34.6	37.0	31.0	31.6	33.8	36.1	29.4	30.1	32.1	34.3	27.2	27.8	29.7	31.8	23.4	23.9	25.6	27.4	
		kW Capacity	9.8	10.0	10.6	11.4	9.5	9.7	10.4	11.1	9.3	9.5	10.2	10.9	9.1	9.3	9.9	10.6	8.6	8.8	9.4	10.1	8.0	8.2	8.7	9.3	6.9	7.0	7.5	8.0	
		S/T	0.94	0.88	0.72	0.54	0.98	0.92	0.75	0.56	1.00	0.94	0.77	0.57	1.00	0.97	0.79	0.59	1.00	1.00	0.82	0.61	1.00	1.00	0.83	0.62	1.00	1.00	0.86	0.65	
		kW Input	2.99	3.06	3.16	3.27	3.24	3.32	3.43	3.55	3.46	3.55	3.67	3.80	3.66	3.75	3.88	4.02	3.83	3.92	4.06	4.21	3.97	4.07	4.21	4.36	4.28	4.38	4.54	4.70	
85 29	1058 1799	MBh	33.9	34.5	36.2	38.6	33.1	33.7	35.3	37.7	32.3	32.9	34.5	36.8	31.5	32.1	33.6	35.9	29.9	30.5	31.9	34.1	27.7	28.3	29.6	31.6	23.8	24.3	25.5	27.2	
		kW Capacity	9.9	10.1	10.6	11.3	9.7	9.9	10.4	11.0	9.5	9.6	10.1	10.8	9.2	9.4	9.9	10.5	8.8	8.9	9.4	10.0	8.1	8.3	8.7	9.3	7.0	7.1	7.5	8.0	
		S/T	0.99	0.95	0.86	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.74	1.00	1.00	0.94	0.77	1.00	1.00	0.98	0.80	1.00	1.00	0.99	0.80	1.00	1.00	1.00	0.83	
		kW Input	3.01	3.08	3.19	3.30	3.27	3.35	3.46	3.59	3.49	3.58	3.70	3.84	3.69	3.78	3.91	4.06	3.86	3.95	4.09	4.24	4.01	4.10	4.25	4.40	4.32	4.42	4.58	4.75	

NAC036*W/EBW3600A

NET COOLING CAPACITY

Expanded Performance Data - COOLING CAPACITY

IDB	airflow CFM	F/C	CMH	Ambient Air Temperature Deg F/C Dry Bulb																											
				65 18				75 24				85 29				95 35				105 41				115 46				125 51			
				Entering Indoor Air Temperature WB Deg																											
Deg F	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71			
Deg C	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22			
70 21	925 1573	MBh	30.5	31.7	34.7	-	29.8	30.9	33.9	-	29.1	30.2	33.1	-	28.4	29.4	32.3	-	27.0	28.0	30.6	-	25.0	25.9	28.4	-	21.5	22.3	24.4	-	
		kW Capacity	9.0	9.3	10.2	-	8.7	9.1	9.9	-	8.5	8.8	9.7	-	8.3	8.6	9.5	-	7.9	8.2	9.0	-	7.3	7.6	8.3	-	6.3	6.5	7.2	-	
		S/T	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.77	0.65	0.45	-	0.80	0.67	0.46	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	
		kW Input	2.89	2.96	3.07	-	3.14	3.22	3.33	-	3.36	3.44	3.56	-	3.55	3.64	3.77	-	3.72	3.81	3.95	-	3.86	3.95	4.10	-	4.16	4.26	4.41	-	
75 24	925 1573	MBh	31.1	32.0	34.6	37.1	30.3	31.2	33.8	36.3	29.6	30.5	33.0	35.4	28.9	29.7	32.2	34.6	27.4	28.3	30.6	32.8	25.4	26.2	28.3	30.4	21.9	22.5	24.4	26.2	
		kW Capacity	9.1	9.4	10.1	10.9	8.9	9.2	9.9	10.6	8.7	8.9	9.7	10.4	8.5	8.7	9.4	10.1	8.0	8.3	9.0	9.6	7.5	7.7	8.3	8.9	6.4	6.6	7.1	7.7	
		S/T	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.60	0.38	0.91	0.81	0.61	0.40	0.94	0.84	0.64	0.41	0.95	0.85	0.64	0.41	1.00	1.00	0.67	0.44	
		kW Input	2.92	2.99	3.09	3.20	3.17	3.25	3.36	3.48	3.39	3.47	3.60	3.73	3.59	3.67	3.80	3.94	3.75	3.84	3.98	4.13	3.90	3.99	4.13	4.29	4.20	4.30	4.45	4.61	
80 27	925 1573	MBh	31.6	32.3	34.5	36.9	30.9	31.5	33.7	36.0	30.1	30.8	32.9	35.2	29.4	30.0	32.1	34.3	27.9	28.5	30.5	32.6	25.9	26.4	28.2	30.2	22.3	22.7	24.3	26.0	
		kW Capacity	9.3	9.5	10.1	10.8	9.0	9.2	9.9	10.6	8.8	9.0	9.6	10.3	8.6	8.8	9.4	10.1	8.2	8.4	8.9	9.6	7.6	7.7	8.3	8.9	6.5	6.7	7.1	7.6	
		S/T	0.91	0.85	0.69	0.52	0.94	0.88	0.72	0.54	0.96	0.90	0.74	0.55	1.00	0.93	0.76	0.57	1.00	0.97	0.79	0.59	1.00	0.98	0.80	0.59	1.00	1.00	0.83	0.62	
		kW Input	2.95	3.02	3.12	3.23	3.20	3.28	3.39	3.51	3.42	3.50	3.63	3.76	3.62	3.71	3.84	3.98	3.79	3.88	4.02	4.17	3.93	4.03	4.17	4.33	4.23	4.34	4.49	4.66	
85 29	925 1573	MBh	32.2	32.8	34.3	36.6	31.4	32.0	33.5	35.8	30.7	31.3	32.7	34.9	29.9	30.5	31.9	34.1	28.4	29.0	30.3	32.4	26.3	26.8	28.1	30.0	22.6	23.1	24.2	25.8	
		kW Capacity	9.4	9.6	10.1	10.7	9.2	9.4	9.8	10.5	9.0	9.2	9.6	10.2	8.8	8.9	9.4	10.0	8.3	8.5	8.9	9.5	7.7	7.9	8.2	8.8	6.6	6.8	7.1	7.6	
		S/T	0.95	0.92	0.83	0.67	0.99	0.95	0.86	0.70	1.00	0.98	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.77	1.00	1.00	0.95	0.77	1.00	1.00	1.00	0.80	
		kW Input	2.97	3.04	3.15	3.26	3.23	3.31	3.42	3.55	3.45	3.54	3.66	3.80	3.65	3.74	3.88	4.02	3.82	3.91	4.06	4.20	3.97	4.06	4.21	4.37	4.27	4.38	4.53	4.70	

NAC036*W/EBW4200A

NET COOLING CAPACITY

Expanded Performance Data - COOLING CAPACITY

IDB	airflow CFM	F/C		Ambient Air Temperature Deg F/C Dry Bulb																											
				65				75				85				95				105				115				125			
				18				24				29				35				41				46				51			
F/C	CMH	Deg F	Deg C	Entering Indoor Air Temperature WB Deg																											
				59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
				15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22
70 21	1394 2370	MBh	35.3	36.6	40.1	-	34.5	35.7	39.1	-	33.7	34.9	38.2	-	32.8	34.0	37.3	-	31.2	32.3	35.4	-	28.9	29.9	32.8	-	24.9	25.8	28.2	-	
		kW Capacity	10.3	10.7	11.7	-	10.1	10.5	11.5	-	9.9	10.2	11.2	-	9.6	10.0	10.9	-	9.1	9.5	10.4	-	8.5	8.8	9.6	-	7.3	7.6	8.3	-	
		S/T	0.81	0.68	0.47	-	0.84	0.70	0.49	-	0.87	0.72	0.50	-	0.89	0.75	0.52	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	
		kW Input	2.89	2.95	3.05	-	3.12	3.19	3.30	-	3.32	3.40	3.51	-	3.50	3.58	3.70	-	3.66	3.74	3.87	-	3.79	3.88	4.01	-	4.10	4.19	4.33	-	
75 24	1394 2370	MBh	35.9	37.0	40.0	42.9	35.1	36.1	39.1	41.9	34.2	35.2	38.1	40.9	33.4	34.4	37.2	39.9	31.7	32.7	35.4	37.9	29.4	30.3	32.7	35.1	25.3	26.0	28.2	30.2	
		kW Capacity	10.5	10.8	11.7	12.6	10.3	10.6	11.5	12.3	10.0	10.3	11.2	12.0	9.8	10.1	10.9	11.7	9.3	9.6	10.4	11.1	8.6	8.9	9.6	10.3	7.4	7.6	8.3	8.9	
		S/T	0.93	0.83	0.63	0.40	0.96	0.86	0.65	0.42	0.98	0.88	0.67	0.43	1.00	0.91	0.69	0.44	1.00	0.94	0.71	0.46	1.00	0.95	0.72	0.46	1.00	1.00	0.75	0.49	
		kW Input	2.91	2.98	3.08	3.18	3.15	3.22	3.32	3.44	3.35	3.43	3.54	3.67	3.53	3.61	3.74	3.87	3.69	3.77	3.90	4.04	3.82	3.91	4.04	4.19	4.13	4.23	4.37	4.52	
80 27	1394 2370	MBh	36.5	37.3	39.9	42.6	35.7	36.5	39.0	41.6	34.8	35.6	38.0	40.7	34.0	34.7	37.1	39.7	32.3	33.0	35.2	37.7	29.9	30.6	32.6	34.9	25.7	26.3	28.1	30.0	
		kW Capacity	10.7	10.9	11.7	12.5	10.5	10.7	11.4	12.2	10.2	10.4	11.1	11.9	10.0	10.2	10.9	11.6	9.5	9.7	10.3	11.0	8.8	9.0	9.6	10.2	7.5	7.7	8.2	8.8	
		S/T	1.00	0.95	0.77	0.58	1.00	0.99	0.80	0.60	1.00	1.00	0.82	0.62	1.00	1.00	0.85	0.64	1.00	1.00	0.88	0.66	1.00	1.00	0.89	0.66	1.00	1.00	0.92	0.69	
		kW Input	2.94	3.00	3.10	3.21	3.17	3.24	3.35	3.47	3.38	3.46	3.57	3.70	3.56	3.65	3.77	3.90	3.72	3.81	3.94	4.07	3.85	3.94	4.08	4.22	4.17	4.27	4.41	4.56	
85 29	1394 2370	MBh	37.2	37.9	39.7	42.3	36.3	37.0	38.8	41.4	35.4	36.1	37.8	40.4	34.6	35.2	36.9	39.4	32.8	33.5	35.1	37.4	30.4	31.0	32.5	34.7	26.2	26.7	27.9	29.8	
		kW Capacity	10.9	11.1	11.6	12.4	10.6	10.8	11.4	12.1	10.4	10.6	11.1	11.8	10.1	10.3	10.8	11.5	9.6	9.8	10.3	11.0	8.9	9.1	9.5	10.2	7.7	7.8	8.2	8.7	
		S/T	1.00	1.00	0.93	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.98	0.80	1.00	1.00	1.00	0.82	1.00	1.00	1.00	0.86	1.00	1.00	1.00	0.86	1.00	1.00	1.00	0.89	
		kW Input	2.96	3.03	3.13	3.23	3.20	3.27	3.38	3.50	3.41	3.49	3.60	3.73	3.60	3.68	3.80	3.93	3.75	3.84	3.97	4.11	3.89	3.98	4.12	4.26	4.21	4.30	4.45	4.60	

NAC036*W/EBW4200A

NET COOLING CAPACITY

Expanded Performance Data - COOLING CAPACITY

IDB	airflow		Ambient Air Temperature Deg F/C Dry Bulb																																			
			65				75				85				95				105				115				125											
			18				24				29				35				41				46				51											
F/C	CFM	CMH	Entering Indoor Air Temperature WB Deg																																			
			Deg F				59				63				67				71				59				63				67				71			
			Deg C				15				17				19				22				15				17				19				22			
70 21	1232 2094	MBh	34.2	35.5	38.9	-	33.5	34.7	38.0	-	32.7	33.8	37.1	-	31.9	33.0	36.2	-	30.3	31.4	34.4	-	28.0	29.1	31.8	-	24.1	25.0	27.4	-								
		kW Capacity	10.0	10.4	11.4	-	9.8	10.2	11.1	-	9.6	9.9	10.9	-	9.3	9.7	10.6	-	8.9	9.2	10.1	-	8.2	8.5	9.3	-	7.1	7.3	8.0	-								
		S/T	0.78	0.65	0.45	-	0.80	0.67	0.47	-	0.82	0.69	0.48	-	0.85	0.71	0.49	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-								
		kW Input	2.86	2.92	3.02	-	3.09	3.16	3.27	-	3.30	3.37	3.49	-	3.48	3.56	3.68	-	3.63	3.72	3.85	-	3.77	3.86	3.99	-	4.07	4.17	4.31	-								
75 24	1232 2094	MBh	34.8	35.9	38.8	41.7	34.0	35.0	37.9	40.7	33.2	34.2	37.0	39.7	32.4	33.4	36.1	38.8	30.8	31.7	34.3	36.8	28.5	29.4	31.8	34.1	24.5	25.3	27.3	29.3								
		kW Capacity	10.2	10.5	11.4	12.2	10.0	10.3	11.1	11.9	9.7	10.0	10.8	11.6	9.5	9.8	10.6	11.4	9.0	9.3	10.1	10.8	8.4	8.6	9.3	10.0	7.2	7.4	8.0	8.6								
		S/T	0.88	0.79	0.60	0.38	0.91	0.82	0.62	0.40	0.94	0.84	0.63	0.41	0.97	0.87	0.65	0.42	1.00	0.90	0.68	0.44	1.00	0.91	0.69	0.44	1.00	1.00	0.72	0.47								
		kW Input	2.88	2.95	3.05	3.15	3.12	3.19	3.30	3.41	3.33	3.40	3.52	3.64	3.51	3.59	3.72	3.85	3.67	3.75	3.88	4.02	3.80	3.89	4.03	4.17	4.11	4.20	4.35	4.50								
80 27	1232 2094	MBh	35.4	36.2	38.7	41.4	34.6	35.4	37.8	40.4	33.8	34.5	36.9	39.4	33.0	33.7	36.0	38.5	31.3	32.0	34.2	36.6	29.0	29.7	31.7	33.9	25.0	25.5	27.3	29.1								
		kW Capacity	10.4	10.6	11.3	12.1	10.1	10.4	11.1	11.8	9.9	10.1	10.8	11.6	9.7	9.9	10.6	11.3	9.2	9.4	10.0	10.7	8.5	8.7	9.3	9.9	7.3	7.5	8.0	8.5								
		S/T	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.57	1.00	0.96	0.78	0.59	1.00	1.00	0.81	0.61	1.00	1.00	0.84	0.63	1.00	1.00	0.85	0.63	1.00	1.00	0.88	0.66								
		kW Input	2.91	2.97	3.07	3.18	3.15	3.22	3.33	3.44	3.36	3.43	3.55	3.68	3.54	3.62	3.75	3.88	3.70	3.79	3.92	4.06	3.84	3.93	4.06	4.21	4.14	4.24	4.39	4.54								
85 29	1232 2094	MBh	36.1	36.8	38.5	41.1	35.2	35.9	37.6	40.1	34.4	35.1	36.7	39.2	33.6	34.2	35.8	38.2	31.9	32.5	34.0	36.3	29.5	30.1	31.5	33.6	25.4	25.9	27.1	28.9								
		kW Capacity	10.6	10.8	11.3	12.0	10.3	10.5	11.0	11.8	10.1	10.3	10.8	11.5	9.8	10.0	10.5	11.2	9.3	9.5	10.0	10.6	8.7	8.8	9.2	9.9	7.4	7.6	7.9	8.5								
		S/T	1.00	0.98	0.88	0.72	1.00	1.00	0.92	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.79	1.00	1.00	1.00	0.82	1.00	1.00	1.00	0.82	1.00	1.00	1.00	0.85								
		kW Input	2.93	3.00	3.10	3.21	3.17	3.25	3.36	3.47	3.39	3.46	3.58	3.71	3.57	3.66	3.78	3.92	3.73	3.82	3.95	4.09	3.87	3.96	4.10	4.25	4.18	4.28	4.43	4.58								

NAC036*W/EBW4200A

NET COOLING CAPACITY

Expanded Performance Data - COOLING CAPACITY

IDB	airflow CFM	F/C	CMH	Ambient Air Temperature Deg F/C Dry Bulb																											
				65 18				75 24				85 29				95 35				105 41				115 46				125 51			
				Entering Indoor Air Temperature WB Deg																											
Deg F	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71			
Deg C	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22			
70 21	1046 1778	MBh	33.3	34.5	37.8	-	32.5	33.7	36.9	-	31.7	32.9	36.1	-	31.0	32.1	35.2	-	29.4	30.5	33.4	-	27.3	28.3	31.0	-	23.4	24.3	26.6	-	
		kW Capacity	9.8	10.1	11.1	-	9.5	9.9	10.8	-	9.3	9.6	10.6	-	9.1	9.4	10.3	-	8.6	8.9	9.8	-	8.0	8.3	9.1	-	6.9	7.1	7.8	-	
		S/T	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	
		kW Input	2.83	2.89	2.99	-	3.06	3.13	3.24	-	3.27	3.35	3.47	-	3.46	3.54	3.66	-	3.61	3.70	3.83	-	3.75	3.84	3.97	-	4.04	4.14	4.29	-	
75 24	1046 1778	MBh	33.9	34.9	37.7	40.5	33.1	34.1	36.9	39.6	32.3	33.2	36.0	38.6	31.5	32.4	35.1	37.7	29.9	30.8	33.3	35.8	27.7	28.5	30.9	33.2	23.8	24.6	26.6	28.5	
		kW Capacity	9.9	10.2	11.1	11.9	9.7	10.0	10.8	11.6	9.5	9.7	10.5	11.3	9.2	9.5	10.3	11.0	8.8	9.0	9.8	10.5	8.1	8.4	9.1	9.7	7.0	7.2	7.8	8.4	
		S/T	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.89	0.80	0.60	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.65	0.42	0.96	0.86	0.65	0.42	1.00	1.00	0.68	0.45	
		kW Input	2.85	2.92	3.02	3.12	3.09	3.16	3.27	3.39	3.30	3.38	3.50	3.62	3.49	3.57	3.70	3.83	3.65	3.73	3.87	4.00	3.78	3.87	4.01	4.16	4.08	4.18	4.32	4.48	
80 27	1046 1778	MBh	34.5	35.2	37.6	40.2	33.7	34.4	36.8	39.3	32.9	33.6	35.9	38.4	32.1	32.8	35.0	37.4	30.5	31.1	33.3	35.5	28.2	28.8	30.8	32.9	24.3	24.8	26.5	28.3	
		kW Capacity	10.1	10.3	11.0	11.8	9.9	10.1	10.8	11.5	9.6	9.8	10.5	11.2	9.4	9.6	10.3	11.0	8.9	9.1	9.7	10.4	8.3	8.4	9.0	9.7	7.1	7.3	7.8	8.3	
		S/T	0.92	0.86	0.70	0.52	0.95	0.89	0.73	0.54	0.98	0.92	0.75	0.56	1.00	0.95	0.77	0.58	1.00	0.98	0.80	0.60	1.00	0.99	0.81	0.60	1.00	1.00	0.84	0.63	
		kW Input	2.88	2.94	3.04	3.15	3.12	3.19	3.30	3.42	3.33	3.41	3.53	3.66	3.52	3.60	3.73	3.86	3.68	3.77	3.90	4.04	3.82	3.91	4.05	4.19	4.12	4.22	4.36	4.52	
85 29	1046 1778	MBh	35.1	35.7	37.4	39.9	34.3	34.9	36.6	39.0	33.4	34.1	35.7	38.1	32.6	33.3	34.8	37.2	31.0	31.6	33.1	35.3	28.7	29.3	30.6	32.7	24.7	25.2	26.4	28.1	
		kW Capacity	10.3	10.5	11.0	11.7	10.0	10.2	10.7	11.4	9.8	10.0	10.5	11.2	9.6	9.7	10.2	10.9	9.1	9.3	9.7	10.3	8.4	8.6	9.0	9.6	7.2	7.4	7.7	8.2	
		S/T	0.96	0.93	0.84	0.68	1.00	0.96	0.87	0.71	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.96	0.78	1.00	1.00	1.00	0.81	
		kW Input	2.90	2.97	3.07	3.18	3.14	3.22	3.33	3.45	3.36	3.44	3.56	3.69	3.55	3.63	3.76	3.90	3.71	3.80	3.94	4.08	3.85	3.94	4.08	4.23	4.15	4.25	4.40	4.56	

NAC048AW.EBW4800A

NET COOLING CAPACITY

Expanded Performance Data - COOLING CAPACITY

IDB	airflow CFM	F/C		Ambient Air Temperature Deg F/C Dry Bulb																											
				65				75				85				95				105				115				125			
				18	18	18	18	24	24	24	24	29	29	29	29	35	35	35	35	41	41	41	41	46	46	46	46	51	51	51	51
Entering Indoor Air Temperature WB Deg																															
			Deg F	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
			Deg C	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22
70	1622	MBh	42.4	44.0	48.2	-	41.4	43.0	47.1	-	40.5	41.9	45.9	-	39.5	40.9	44.8	-	37.5	38.9	42.6	-	34.7	36.0	39.4	-	29.9	31.0	33.9	-	
		kW Capacity	12.4	12.9	14.1	-	12.1	12.6	13.8	-	11.9	12.3	13.5	-	11.6	12.0	13.1	-	11.0	11.4	12.5	-	10.2	10.6	11.6	-	8.8	9.1	9.9	-	
		S/T	0.71	0.59	0.41	-	0.73	0.61	0.43	-	0.75	0.63	0.44	-	0.78	0.65	0.45	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	
21	2757	kW Input	4.31	4.41	4.56	-	4.67	4.77	4.94	-	4.98	5.10	5.28	-	5.26	5.39	5.58	-	5.50	5.63	5.83	-	5.71	5.84	6.05	-	6.16	6.30	6.53	-	
		MBh	43.2	44.4	48.1	51.6	42.1	43.4	47.0	50.4	41.1	42.4	45.9	49.2	40.1	41.3	44.7	48.0	38.1	39.3	42.5	45.6	35.3	36.4	39.4	42.2	30.4	31.3	33.9	36.3	
		kW Capacity	12.6	13.0	14.1	15.1	12.4	12.7	13.8	14.8	12.1	12.4	13.4	14.4	11.8	12.1	13.1	14.1	11.2	11.5	12.5	13.4	10.4	10.7	11.5	12.4	8.9	9.2	9.9	10.7	
75	1622	S/T	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.60	0.38	0.92	0.82	0.62	0.40	0.93	0.83	0.63	0.40	1.00	1.00	0.66	0.43	
		kW Input	4.34	4.44	4.60	4.76	4.71	4.82	4.98	5.16	5.03	5.15	5.33	5.52	5.31	5.44	5.63	5.83	5.55	5.68	5.89	6.10	5.76	5.90	6.11	6.33	6.21	6.36	6.59	6.82	
		MBh	43.9	44.9	47.9	51.3	42.9	43.8	46.8	50.1	41.9	42.8	45.7	48.9	40.9	41.7	44.6	47.7	38.8	39.7	42.4	45.3	36.0	36.7	39.2	42.0	30.9	31.6	33.8	36.1	
80	1622	kW Capacity	12.9	13.2	14.1	15.0	12.6	12.8	13.7	14.7	12.3	12.5	13.4	14.3	12.0	12.2	13.1	14.0	11.4	11.6	12.4	13.3	10.5	10.8	11.5	12.3	9.1	9.3	9.9	10.6	
		S/T	0.88	0.83	0.67	0.50	0.92	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.57	1.00	0.95	0.77	0.58	1.00	1.00	0.80	0.61	
		kW Input	4.38	4.48	4.64	4.80	4.75	4.86	5.03	5.21	5.07	5.19	5.37	5.57	5.36	5.49	5.68	5.88	5.60	5.74	5.94	6.15	5.81	5.95	6.16	6.39	6.27	6.42	6.65	6.88	
27	2757	MBh	44.7	45.5	47.7	50.9	43.6	44.5	46.6	49.7	42.6	43.4	45.5	48.5	41.6	42.4	44.4	47.3	39.5	40.3	42.2	45.0	36.6	37.3	39.1	41.7	31.5	32.1	33.6	35.8	
		kW Capacity	13.1	13.4	14.0	14.9	12.8	13.0	13.7	14.6	12.5	12.7	13.3	14.2	12.2	12.4	13.0	13.9	11.6	11.8	12.4	13.2	10.7	10.9	11.4	12.2	9.2	9.4	9.8	10.5	
		S/T	0.93	0.89	0.81	0.65	0.96	0.93	0.84	0.68	0.98	0.95	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.75	1.00	1.00	1.00	0.78	
85	1622	kW Input	4.42	4.52	4.68	4.84	4.79	4.90	5.07	5.25	5.12	5.24	5.42	5.62	5.41	5.54	5.73	5.94	5.65	5.79	5.99	6.21	5.86	6.01	6.22	6.44	6.33	6.48	6.71	6.95	
		MBh	44.7	45.5	47.7	50.9	43.6	44.5	46.6	49.7	42.6	43.4	45.5	48.5	41.6	42.4	44.4	47.3	39.5	40.3	42.2	45.0	36.6	37.3	39.1	41.7	31.5	32.1	33.6	35.8	
		kW Capacity	13.1	13.4	14.0	14.9	12.8	13.0	13.7	14.6	12.5	12.7	13.3	14.2	12.2	12.4	13.0	13.9	11.6	11.8	12.4	13.2	10.7	10.9	11.4	12.2	9.2	9.4	9.8	10.5	
29	2757	S/T	0.93	0.89	0.81	0.65	0.96	0.93	0.84	0.68	0.98	0.95	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.75	1.00	1.00	1.00	0.78	
		kW Input	4.42	4.52	4.68	4.84	4.79	4.90	5.07	5.25	5.12	5.24	5.42	5.62	5.41	5.54	5.73	5.94	5.65	5.79	5.99	6.21	5.86	6.01	6.22	6.44	6.33	6.48	6.71	6.95	
		MBh	44.7	45.5	47.7	50.9	43.6	44.5	46.6	49.7	42.6	43.4	45.5	48.5	41.6	42.4	44.4	47.3	39.5	40.3	42.2	45.0	36.6	37.3	39.1	41.7	31.5	32.1	33.6	35.8	

NAC048AW.EBW4800A

NET COOLING CAPACITY

Expanded Performance Data - COOLING CAPACITY

IDB	airflow CFM	F/C	CMH	Ambient Air Temperature Deg F/C Dry Bulb																											
				65				75				85				95				105				115				125			
				18	24	29	35	41	46	51																					
Entering Indoor Air Temperature WB Deg																															
		Deg F	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
		Deg C	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	
70	1535	MBh	42.0	43.5	47.6	-	41.0	42.5	46.5	-	40.0	41.5	45.4	-	39.0	40.5	44.3	-	37.1	38.4	42.1	-	34.3	35.6	39.0	-	29.5	30.6	33.6	-	
		kW Capacity	12.3	12.7	14.0	-	12.0	12.4	13.6	-	11.7	12.2	13.3	-	11.4	11.9	13.0	-	10.9	11.3	12.3	-	10.1	10.4	11.4	-	8.7	9.0	9.8	-	
		S/T	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	
21	2610	kW Input	4.27	4.37	4.52	-	4.63	4.74	4.90	-	4.94	5.06	5.24	-	5.22	5.35	5.54	-	5.46	5.59	5.79	-	5.67	5.80	6.01	-	6.11	6.26	6.48	-	
		MBh	42.7	43.9	47.5	51.0	41.7	42.9	46.4	49.8	40.7	41.9	45.3	48.7	39.7	40.9	44.2	47.5	37.7	38.8	42.0	45.1	34.9	36.0	38.9	41.8	30.0	30.9	33.5	35.9	
		kW Capacity	12.5	12.9	13.9	15.0	12.2	12.6	13.6	14.6	11.9	12.3	13.3	14.3	11.6	12.0	13.0	13.9	11.1	11.4	12.3	13.2	10.2	10.5	11.4	12.2	8.8	9.1	9.8	10.5	
75	24	S/T	0.82	0.73	0.55	0.36	0.85	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.94	0.84	0.63	0.41	1.00	1.00	0.66	0.44	
		kW Input	4.31	4.41	4.56	4.72	4.67	4.78	4.95	5.12	4.99	5.11	5.29	5.48	5.27	5.40	5.59	5.79	5.51	5.64	5.85	6.06	5.72	5.86	6.07	6.29	6.17	6.32	6.54	6.77	
		MBh	43.4	44.4	47.4	50.7	42.4	43.3	46.3	49.5	41.4	42.3	45.2	48.3	40.4	41.3	44.1	47.1	38.4	39.2	41.9	44.8	35.5	36.3	38.8	41.5	30.6	31.2	33.4	35.7	
80	27	kW Capacity	12.7	13.0	13.9	14.9	12.4	12.7	13.6	14.5	12.1	12.4	13.2	14.2	11.8	12.1	12.9	13.8	11.2	11.5	12.3	13.1	10.4	10.6	11.4	12.2	9.0	9.2	9.8	10.5	
		S/T	0.90	0.84	0.68	0.51	0.93	0.87	0.71	0.53	0.95	0.89	0.73	0.54	0.98	0.92	0.75	0.56	1.00	0.96	0.78	0.58	1.00	0.96	0.78	0.59	1.00	1.00	0.81	0.62	
		kW Input	4.34	4.45	4.60	4.76	4.71	4.82	4.99	5.17	5.03	5.15	5.34	5.53	5.32	5.45	5.64	5.84	5.56	5.70	5.90	6.11	5.77	5.91	6.12	6.35	6.22	6.37	6.60	6.84	
85	29	MBh	44.2	45.0	47.2	50.3	43.2	44.0	46.1	49.2	42.1	42.9	45.0	48.0	41.1	41.9	43.9	46.8	39.0	39.8	41.7	44.5	36.2	36.9	38.6	41.2	31.1	31.7	33.2	35.4	
		kW Capacity	13.0	13.2	13.8	14.7	12.6	12.9	13.5	14.4	12.3	12.6	13.2	14.1	12.0	12.3	12.9	13.7	11.4	11.7	12.2	13.0	10.6	10.8	11.3	12.1	9.1	9.3	9.7	10.4	
		S/T	0.94	0.91	0.82	0.66	0.97	0.94	0.85	0.69	1.00	0.96	0.87	0.71	1.00	0.99	0.90	0.73	1.00	1.00	0.93	0.76	1.00	1.00	0.94	0.76	1.00	1.00	1.00	0.79	
kW Input	4.38	4.48	4.64	4.80	4.75	4.86	5.03	5.21	5.08	5.20	5.38	5.58	5.37	5.50	5.69	5.90	5.61	5.75	5.95	6.17	5.82	5.96	6.18	6.40	6.28	6.43	6.66	6.90			

NAC048AW.EBW4800A

NET COOLING CAPACITY

Expanded Performance Data - COOLING CAPACITY

IDB	airflow	F/C		Ambient Air Temperature Deg F/C Dry Bulb																											
				65				75				85				95				105				115				125			
				18				24				29				35				41				46				51			
CFM	CMH	Deg F	Deg C	Entering Indoor Air Temperature WB Deg																											
				59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
				15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22
70	1422	MBh	40.8	42.3	46.3	-	39.9	41.3	45.3	-	38.9	40.3	44.2	-	38.0	39.4	43.1	-	36.1	37.4	41.0	-	33.4	34.6	37.9	-	28.7	29.8	32.6	-	
		kW Capacity	12.0	12.4	13.6	-	11.7	12.1	13.3	-	11.4	11.8	13.0	-	11.1	11.5	12.6	-	10.6	11.0	12.0	-	9.8	10.1	11.1	-	8.4	8.7	9.6	-	
		S/T	0.69	0.58	0.40	-	0.71	0.60	0.41	-	0.73	0.61	0.42	-	0.76	0.63	0.44	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	
21	2417	kW Input	4.18	4.28	4.43	-	4.54	4.65	4.81	-	4.85	4.97	5.14	-	5.13	5.25	5.44	-	5.36	5.49	5.69	-	5.57	5.70	5.91	-	6.00	6.15	6.36	-	
		MBh	41.5	42.7	46.3	49.6	40.5	41.7	45.2	48.5	39.6	40.7	44.1	47.3	38.6	39.8	43.0	46.2	36.7	37.8	40.9	43.9	34.0	35.0	37.9	40.6	29.2	30.1	32.6	35.0	
		kW Capacity	12.2	12.5	13.6	14.6	11.9	12.2	13.2	14.2	11.6	11.9	12.9	13.9	11.3	11.7	12.6	13.5	10.8	11.1	12.0	12.9	10.0	10.3	11.1	11.9	8.6	8.8	9.5	10.2	
75	24	S/T	0.78	0.70	0.53	0.34	0.81	0.73	0.55	0.35	0.83	0.75	0.56	0.36	0.86	0.77	0.58	0.37	0.89	0.80	0.60	0.39	0.90	0.81	0.61	0.39	1.00	1.00	0.64	0.42	
		kW Input	4.22	4.32	4.47	4.63	4.58	4.69	4.85	5.03	4.90	5.01	5.19	5.38	5.18	5.30	5.49	5.69	5.41	5.54	5.74	5.95	5.62	5.76	5.96	6.18	6.06	6.20	6.42	6.66	
		MBh	42.2	43.2	46.1	49.3	41.3	42.2	45.0	48.2	40.3	41.2	44.0	47.0	39.3	40.2	42.9	45.9	37.3	38.1	40.8	43.6	34.6	35.3	37.8	40.4	29.7	30.4	32.5	34.7	
80	27	kW Capacity	12.4	12.7	13.5	14.4	12.1	12.4	13.2	14.1	11.8	12.1	12.9	13.8	11.5	11.8	12.6	13.4	10.9	11.2	11.9	12.8	10.1	10.4	11.1	11.8	8.7	8.9	9.5	10.2	
		S/T	0.86	0.81	0.66	0.49	0.89	0.84	0.68	0.51	0.91	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.98	0.92	0.75	0.56	0.99	0.93	0.75	0.56	1.00	1.00	0.78	0.59	
		kW Input	4.26	4.36	4.51	4.67	4.62	4.73	4.90	5.07	4.94	5.06	5.24	5.43	5.22	5.35	5.54	5.74	5.46	5.60	5.80	6.01	5.67	5.81	6.02	6.24	6.11	6.26	6.48	6.72	
85	29	MBh	43.0	43.8	45.9	49.0	42.0	42.8	44.8	47.8	41.0	41.8	43.8	46.7	40.0	40.8	42.7	45.5	38.0	38.7	40.6	43.3	35.2	35.9	37.6	40.1	30.3	30.9	32.3	34.5	
		kW Capacity	12.6	12.8	13.4	14.3	12.3	12.5	13.1	14.0	12.0	12.2	12.8	13.7	11.7	11.9	12.5	13.3	11.1	11.3	11.9	12.7	10.3	10.5	11.0	11.7	8.9	9.0	9.5	10.1	
		S/T	0.90	0.87	0.79	0.64	0.93	0.90	0.81	0.66	0.96	0.92	0.83	0.68	0.99	0.95	0.86	0.70	1.00	0.99	0.89	0.73	1.00	1.00	0.90	0.73	1.00	1.00	1.00	0.76	
		kW Input	4.30	4.40	4.55	4.71	4.66	4.77	4.94	5.12	4.99	5.10	5.29	5.48	5.27	5.40	5.59	5.79	5.51	5.65	5.85	6.06	5.72	5.86	6.07	6.29	6.17	6.32	6.54	6.78	

NAC048AW.EBW6000A

NET COOLING CAPACITY

Expanded Performance Data - COOLING CAPACITY

IDB	airflow CFM	F/C	CMH	Ambient Air Temperature Deg F/C Dry Bulb																											
				65				75				85				95				105				115				125			
				18	18	18	18	24	24	24	24	29	29	29	29	35	35	35	35	41	41	41	41	46	46	46	46	51	51	51	51
Entering Indoor Air Temperature WB Deg																															
		Deg F	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
		Deg C	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	
70	1788	MBh	46.0	47.6	52.2	-	44.9	46.5	51.0	-	43.8	45.4	49.8	-	42.7	44.3	48.5	-	40.6	42.1	46.1	-	37.6	39.0	42.7	-	32.4	33.5	36.7	-	
		kW Capacity	13.5	14.0	15.3	-	13.2	13.6	14.9	-	12.8	13.3	14.6	-	12.5	13.0	14.2	-	11.9	12.3	13.5	-	11.0	11.4	12.5	-	9.5	9.8	10.8	-	
		S/T	0.78	0.65	0.45	-	0.80	0.67	0.47	-	0.82	0.69	0.48	-	0.85	0.71	0.49	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	
21	3040	kW Input	4.43	4.53	4.69	-	4.80	4.91	5.08	-	5.12	5.24	5.42	-	5.41	5.53	5.73	-	5.65	5.78	5.99	-	5.86	6.00	6.21	-	6.33	6.47	6.70	-	
		MBh	46.7	48.1	52.1	55.9	45.6	47.0	50.9	54.6	44.6	45.9	49.7	53.3	43.5	44.8	48.4	52.0	41.3	42.5	46.0	49.4	38.3	39.4	42.6	45.8	32.9	33.9	36.7	39.4	
		kW Capacity	13.7	14.1	15.3	16.4	13.4	13.8	14.9	16.0	13.1	13.4	14.6	15.6	12.7	13.1	14.2	15.2	12.1	12.5	13.5	14.5	11.2	11.5	12.5	13.4	9.6	9.9	10.7	11.5	
75	1788	S/T	0.88	0.79	0.60	0.38	0.91	0.82	0.62	0.40	0.94	0.84	0.63	0.41	0.97	0.87	0.65	0.42	1.00	0.90	0.68	0.44	1.00	0.91	0.69	0.44	1.00	1.00	0.72	0.47	
		kW Input	4.47	4.57	4.73	4.89	4.84	4.95	5.12	5.30	5.17	5.29	5.47	5.66	5.46	5.58	5.78	5.98	5.70	5.83	6.04	6.26	5.91	6.05	6.27	6.49	6.38	6.53	6.76	7.00	
		MBh	47.6	48.6	51.9	55.5	46.5	47.5	50.7	54.2	45.3	46.3	49.5	52.9	44.2	45.2	48.3	51.6	42.0	42.9	45.9	49.1	38.9	39.8	42.5	45.4	33.5	34.2	36.6	39.1	
80	1788	kW Capacity	13.9	14.2	15.2	16.3	13.6	13.9	14.9	15.9	13.3	13.6	14.5	15.5	13.0	13.3	14.2	15.1	12.3	12.6	13.4	14.4	11.4	11.7	12.5	13.3	9.8	10.0	10.7	11.5	
		S/T	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.57	1.00	0.96	0.78	0.59	1.00	1.00	0.81	0.61	1.00	1.00	0.84	0.63	1.00	1.00	0.85	0.63	1.00	1.00	0.88	0.66	
		kW Input	4.51	4.61	4.77	4.93	4.88	5.00	5.17	5.35	5.21	5.33	5.52	5.71	5.50	5.63	5.83	6.04	5.75	5.89	6.09	6.31	5.96	6.11	6.32	6.55	6.44	6.59	6.82	7.06	
27	3040	MBh	48.4	49.3	51.7	55.1	47.3	48.2	50.5	53.8	46.1	47.0	49.3	52.6	45.0	45.9	48.1	51.3	42.8	43.6	45.7	48.7	39.6	40.4	42.3	45.1	34.1	34.7	36.4	38.8	
		kW Capacity	14.2	14.5	15.1	16.2	13.9	14.1	14.8	15.8	13.5	13.8	14.4	15.4	13.2	13.4	14.1	15.0	12.5	12.8	13.4	14.3	11.6	11.8	12.4	13.2	10.0	10.2	10.7	11.4	
		S/T	1.00	0.98	0.88	0.72	1.00	1.00	0.92	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.79	1.00	1.00	1.00	0.82	1.00	1.00	1.00	0.82	1.00	1.00	1.00	0.85	
85	1788	kW Input	4.55	4.65	4.81	4.98	4.93	5.04	5.21	5.39	5.26	5.38	5.57	5.76	5.55	5.68	5.88	6.09	5.80	5.94	6.15	6.37	6.02	6.16	6.38	6.61	6.50	6.65	6.88	7.13	
		MBh	48.4	49.3	51.7	55.1	47.3	48.2	50.5	53.8	46.1	47.0	49.3	52.6	45.0	45.9	48.1	51.3	42.8	43.6	45.7	48.7	39.6	40.4	42.3	45.1	34.1	34.7	36.4	38.8	
		kW Capacity	14.2	14.5	15.1	16.2	13.9	14.1	14.8	15.8	13.5	13.8	14.4	15.4	13.2	13.4	14.1	15.0	12.5	12.8	13.4	14.3	11.6	11.8	12.4	13.2	10.0	10.2	10.7	11.4	
29	3040	S/T	1.00	0.98	0.88	0.72	1.00	1.00	0.92	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.79	1.00	1.00	1.00	0.82	1.00	1.00	1.00	0.82	1.00	1.00	1.00	0.85	
		kW Input	4.55	4.65	4.81	4.98	4.93	5.04	5.21	5.39	5.26	5.38	5.57	5.76	5.55	5.68	5.88	6.09	5.80	5.94	6.15	6.37	6.02	6.16	6.38	6.61	6.50	6.65	6.88	7.13	
		MBh	48.4	49.3	51.7	55.1	47.3	48.2	50.5	53.8	46.1	47.0	49.3	52.6	45.0	45.9	48.1	51.3	42.8	43.6	45.7	48.7	39.6	40.4	42.3	45.1	34.1	34.7	36.4	38.8	

NAC048AW.EBW6000A

NET COOLING CAPACITY

Expanded Performance Data - COOLING CAPACITY

IDB	airflow CFM	F/C	CMH	Ambient Air Temperature Deg F/C Dry Bulb																											
				65 18				75 24				85 29				95 35				105 41				115 46				125 51			
				Entering Indoor Air Temperature WB Deg																											
Deg F	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71			
Deg C	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22			
70 21	1625 2763	MBh	44.6	46.2	50.7	-	43.6	45.2	49.5	-	42.5	44.1	48.3	-	41.5	43.0	47.1	-	39.4	40.9	44.8	-	36.5	37.9	41.5	-	31.4	32.6	35.7	-	
		kW Capacity	13.1	13.6	14.9	-	12.8	13.2	14.5	-	12.5	12.9	14.2	-	12.2	12.6	13.8	-	11.6	12.0	13.1	-	10.7	11.1	12.2	-	9.2	9.5	10.5	-	
		S/T	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	
		kW Input	4.38	4.48	4.63	-	4.75	4.86	5.03	-	5.07	5.19	5.37	-	5.36	5.48	5.68	-	5.60	5.73	5.94	-	5.81	5.95	6.16	-	6.27	6.42	6.64	-	
75 24	1625 2763	MBh	45.4	46.7	50.6	54.3	44.3	45.6	49.4	53.0	43.3	44.5	48.2	51.7	42.2	43.5	47.0	50.5	40.1	41.3	44.7	48.0	37.1	38.2	41.4	44.4	32.0	32.9	35.6	38.2	
		kW Capacity	13.3	13.7	14.8	15.9	13.0	13.4	14.5	15.5	12.7	13.1	14.1	15.2	12.4	12.7	13.8	14.8	11.8	12.1	13.1	14.1	10.9	11.2	12.1	13.0	9.4	9.6	10.4	11.2	
		S/T	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.89	0.80	0.60	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.65	0.42	0.96	0.86	0.65	0.42	1.00	1.00	0.68	0.45	
		kW Input	4.42	4.52	4.68	4.84	4.79	4.90	5.07	5.25	5.12	5.24	5.42	5.61	5.40	5.53	5.73	5.93	5.65	5.78	5.99	6.21	5.86	6.00	6.22	6.44	6.32	6.47	6.70	6.94	
80 27	1625 2763	MBh	46.2	47.2	50.4	53.9	45.1	46.1	49.2	52.6	44.0	45.0	48.1	51.4	43.0	43.9	46.9	50.1	40.8	41.7	44.6	47.6	37.8	38.6	41.3	44.1	32.5	33.2	35.5	38.0	
		kW Capacity	13.5	13.8	14.8	15.8	13.2	13.5	14.4	15.4	12.9	13.2	14.1	15.1	12.6	12.9	13.7	14.7	12.0	12.2	13.1	14.0	11.1	11.3	12.1	12.9	9.5	9.7	10.4	11.1	
		S/T	0.92	0.86	0.70	0.52	0.95	0.89	0.73	0.54	0.98	0.92	0.75	0.56	1.00	0.95	0.77	0.58	1.00	0.98	0.80	0.60	1.00	0.99	0.81	0.60	1.00	1.00	0.84	0.63	
		kW Input	4.46	4.56	4.72	4.88	4.83	4.94	5.12	5.30	5.16	5.28	5.47	5.66	5.45	5.58	5.78	5.99	5.70	5.84	6.04	6.26	5.91	6.06	6.27	6.50	6.38	6.53	6.76	7.01	
85 29	1625 2763	MBh	47.0	47.9	50.2	53.5	45.9	46.8	49.0	52.3	44.8	45.7	47.8	51.0	43.7	44.6	46.7	49.8	41.5	42.3	44.3	47.3	38.5	39.2	41.1	43.8	33.1	33.7	35.3	37.7	
		kW Capacity	13.8	14.0	14.7	15.7	13.5	13.7	14.4	15.3	13.1	13.4	14.0	15.0	12.8	13.1	13.7	14.6	12.2	12.4	13.0	13.9	11.3	11.5	12.0	12.8	9.7	9.9	10.4	11.0	
		S/T	0.96	0.93	0.84	0.68	1.00	0.96	0.87	0.71	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.96	0.78	1.00	1.00	1.00	0.81	
		kW Input	4.50	4.60	4.76	4.92	4.87	4.99	5.16	5.34	5.21	5.33	5.52	5.71	5.50	5.63	5.83	6.04	5.75	5.89	6.10	6.32	5.97	6.11	6.33	6.56	6.44	6.59	6.82	7.07	

NAC048AW.EBW6000A

NET COOLING CAPACITY

Expanded Performance Data - COOLING CAPACITY

IDB	airflow CFM	F/C	CMH	Ambient Air Temperature Deg F/C Dry Bulb																											
				65				75				85				95				105				115				125			
				18	18	18	18	24	24	24	24	29	29	29	29	35	35	35	35	41	41	41	41	46	46	46	46	51	51	51	51
Entering Indoor Air Temperature WB Deg																															
		Deg F	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
		Deg C	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	15	17	19	22	
70	1372	MBh	42.4	44.0	48.2	-	41.4	43.0	47.1	-	40.5	41.9	45.9	-	39.5	40.9	44.8	-	37.5	38.9	42.6	-	34.7	36.0	39.4	-	29.9	31.0	33.9	-	
		kW Capacity	12.4	12.9	14.1	-	12.1	12.6	13.8	-	11.9	12.3	13.5	-	11.6	12.0	13.1	-	11.0	11.4	12.5	-	10.2	10.6	11.6	-	8.8	9.1	9.9	-	
		S/T	0.71	0.59	0.41	-	0.73	0.61	0.43	-	0.75	0.63	0.44	-	0.78	0.65	0.45	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	1.00	1.00	1.00	-	
		kW Input	4.28	4.38	4.54	-	4.65	4.76	4.93	-	4.97	5.09	5.27	-	5.26	5.38	5.58	-	5.50	5.63	5.84	-	5.71	5.85	6.06	-	6.15	6.30	6.52	-	
75	1372	MBh	43.2	44.4	48.1	51.6	42.1	43.4	47.0	50.4	41.1	42.4	45.9	49.2	40.1	41.3	44.7	48.0	38.1	39.3	42.5	45.6	35.3	36.4	39.4	42.2	30.4	31.3	33.9	36.3	
		kW Capacity	12.6	13.0	14.1	15.1	12.4	12.7	13.8	14.8	12.1	12.4	13.4	14.4	11.8	12.1	13.1	14.1	11.2	11.5	12.5	13.4	10.4	10.7	11.5	12.4	8.9	9.2	9.9	10.7	
		S/T	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.60	0.38	0.92	0.82	0.62	0.40	0.93	0.83	0.63	0.40	1.00	1.00	0.66	0.43	
		kW Input	4.32	4.42	4.58	4.74	4.69	4.80	4.97	5.15	5.02	5.14	5.32	5.51	5.31	5.43	5.63	5.83	5.55	5.68	5.89	6.11	5.76	5.90	6.12	6.34	6.21	6.36	6.59	6.82	
80	1372	MBh	43.9	44.9	47.9	51.3	42.9	43.8	46.8	50.1	41.9	42.8	45.7	48.9	40.9	41.7	44.6	47.7	38.8	39.7	42.4	45.3	36.0	36.7	39.2	42.0	30.9	31.6	33.8	36.1	
		kW Capacity	12.9	13.2	14.1	15.0	12.6	12.8	13.7	14.7	12.3	12.5	13.4	14.3	12.0	12.2	13.1	14.0	11.4	11.6	12.4	13.3	10.5	10.8	11.5	12.3	9.1	9.3	9.9	10.6	
		S/T	0.88	0.83	0.67	0.50	0.92	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.57	1.00	0.95	0.77	0.58	1.00	1.00	0.80	0.61	
		kW Input	4.36	4.46	4.62	4.78	4.73	4.85	5.02	5.20	5.06	5.18	5.37	5.56	5.35	5.48	5.68	5.89	5.60	5.74	5.94	6.16	5.81	5.96	6.17	6.40	6.26	6.42	6.65	6.89	
85	1372	MBh	44.7	45.5	47.7	50.9	43.6	44.5	46.6	49.7	42.6	43.4	45.5	48.5	41.6	42.4	44.4	47.3	39.5	40.3	42.2	45.0	36.6	37.3	39.1	41.7	31.5	32.1	33.6	35.8	
		kW Capacity	13.1	13.4	14.0	14.9	12.8	13.0	13.7	14.6	12.5	12.7	13.3	14.2	12.2	12.4	13.0	13.9	11.6	11.8	12.4	13.2	10.7	10.9	11.4	12.2	9.2	9.4	9.8	10.5	
		S/T	0.93	0.89	0.81	0.65	0.96	0.93	0.84	0.68	0.98	0.95	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.75	1.00	1.00	1.00	0.78	
		kW Input	4.40	4.50	4.66	4.83	4.77	4.89	5.06	5.24	5.11	5.23	5.42	5.61	5.40	5.53	5.73	5.94	5.65	5.79	6.00	6.22	5.87	6.01	6.23	6.46	6.32	6.47	6.71	6.95	